


# 控制箱 配線箱



## 塑膠控制/配線箱

### 產品特色

- 符合防水防塵IP66等級，以及防撞擊IK9
- 使用高階PC(Poly Carbonate)材質，阻燃等級UL 94 5VA，抗紫外線適用於戶外
- 適用於環境溫度 -40°C~+80°C
- 符合CE安全標準

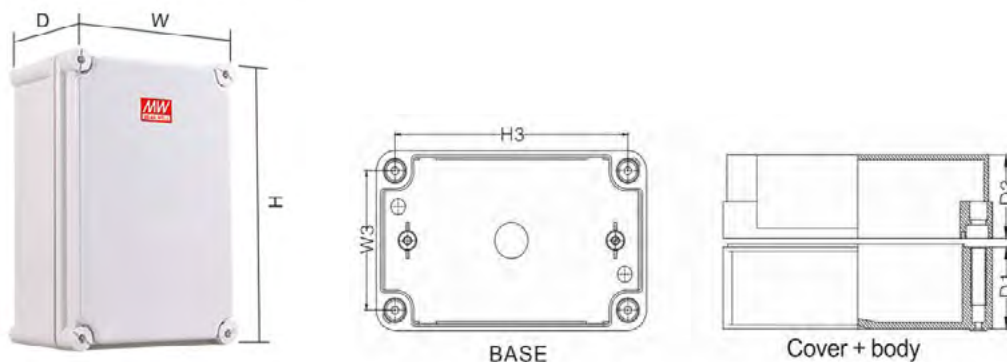

### 配 件



塑膠安裝板



壁掛支架



塑膠外殼螺絲

品 號	尺寸		安裝尺寸		衝擊 防護等級	IP 等級
	寬x高x深	D1+D2	W3	H3		
<a href="#">TJ-AG-0609</a>	65x95x55mm	40+15	50	79	IK9	66
<a href="#">TJ-AG-0811</a>	80x110x70mm	50+20	62	92	IK9	66
<a href="#">TJ-AG-0825</a>	80x250x70mm	50+20	62	232	IK9	66
<a href="#">TJ-AG-1212-S</a>	125x125x75mm	55+20	105	105	IK9	66
<a href="#">TJ-AG-1212</a>	125x125x100mm	80+20	105	105	IK9	66
<a href="#">TJ-AG-1217</a>	125x175x75mm	50+25	109	157	IK9	66
<a href="#">TJ-AG-1417</a>	140x170x95mm	75+20	122	152	IK9	66

品號	尺寸		安裝尺寸		衝擊 防護等級	IP 等級
	寬x高x深	D1+D2	W3	H3		
<a href="#">TJ-AG-1520</a>	150x200x100mm	80+20	132	182	IK9	66
<a href="#">TJ-AG-1525</a>	150x250x100mm	80+20	132	232	IK9	66
<a href="#">TJ-AG-1717</a>	175x175x75mm	50+25	157	157	IK9	66
<a href="#">TJ-AG-2020</a>	200x200x130mm	110+20	182	182	IK9	66
<a href="#">TJ-AG-2819</a>	280x190x130mm	80+32	255	165	IK9	66
<a href="#">TJ-AG-3428</a>	340x280x130mm	98+32	315	255	IK9	66
<a href="#">TJ-AG-3828</a>	380x280x130mm	98+32	355	255	IK9	66