
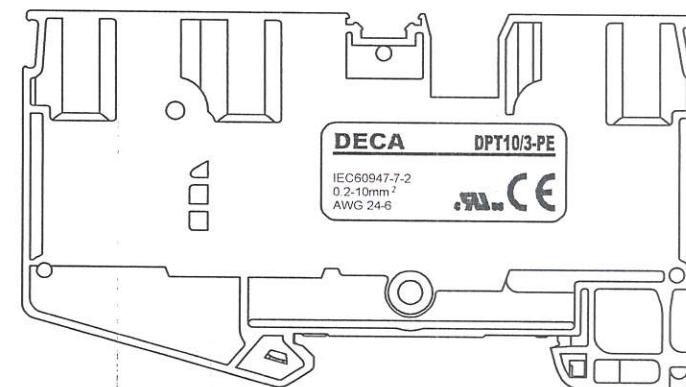
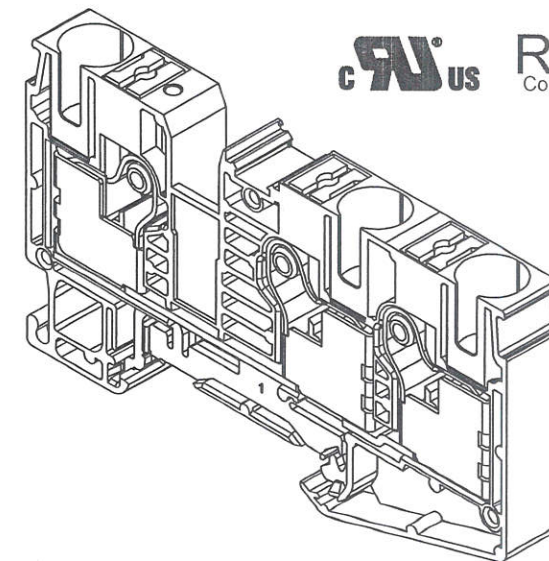


Type No.: DPT10/3-PE

RoHS
Compliant

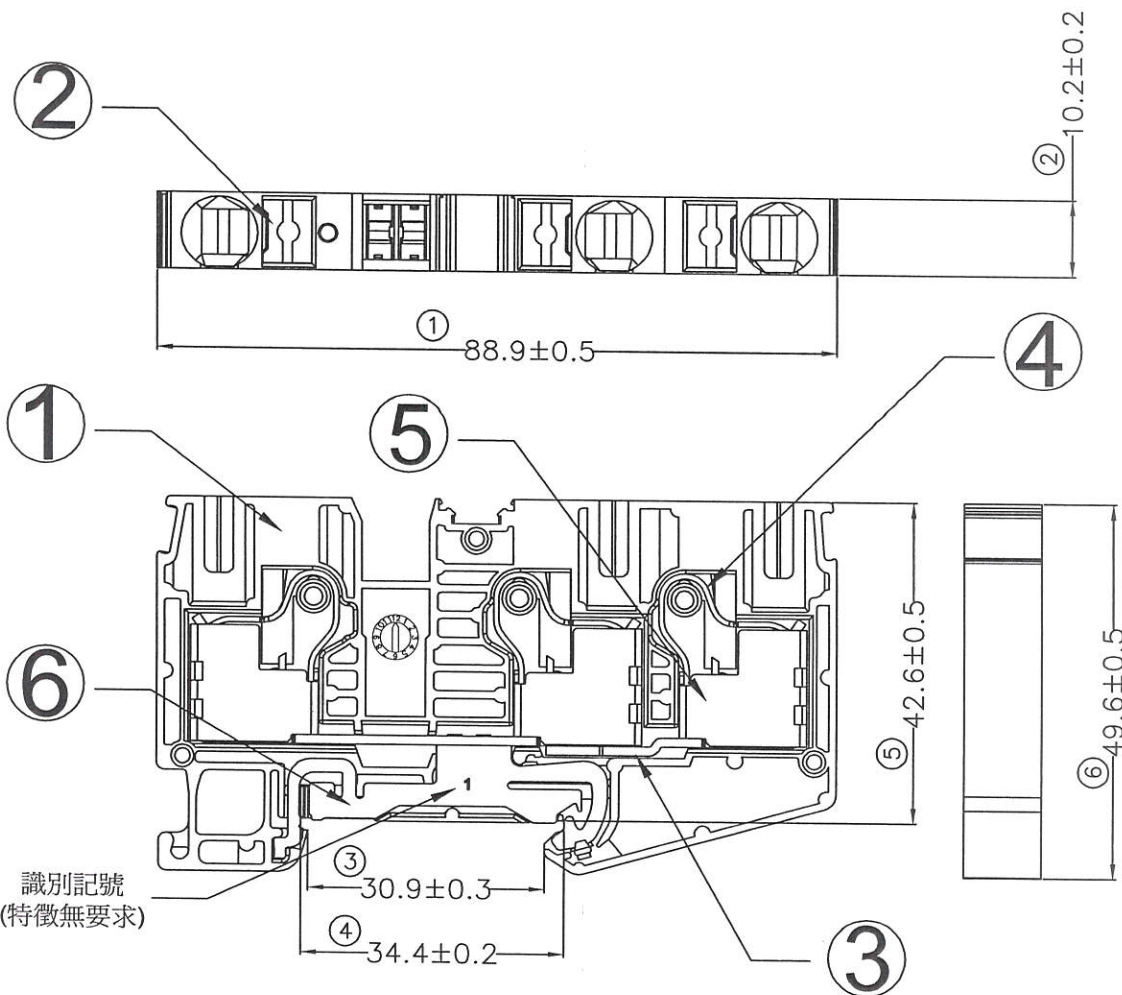

CONFIRMED & ACCEPTED BY				
Material	QTY	Plating/Finish	Remark	
1 Insulating body Polyamide 66	1	Green & Yellow(MIX)		
2 Button PBT	3			
3 Terminal COPPER	1	Tin plated		
4 Spring STAINLESS	3			
5 Shell STAINLESS	3			
6 Terminal COPPER ALLOY	3	Tin plated		

1. Rated current & voltage : 600V(UL)
2. Rated current & voltage : 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 16mm-18mm
6. Wire size : 24 - 6 AWG (0.2-10mm²)

DECA® SwitchLab Inc.

DESIGN Goku	CHECK Sam	APPROVE Alex
DATE 2020/11/23	DATE 2020/11/23	DATE 2020/11/23

PART NAME	UNIT	SCALE
Terminal Blocks	MM	
DRAWING NO.	SHEET	
DPT10/3-PE	1/1	