
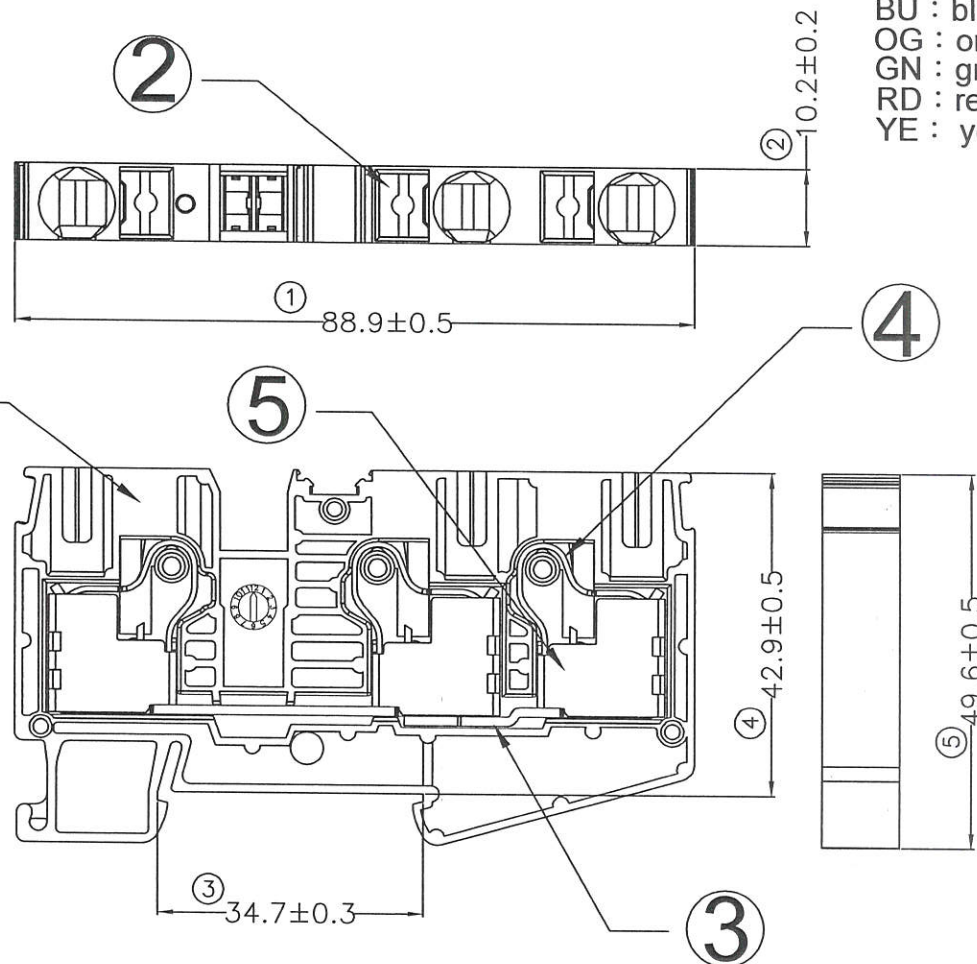
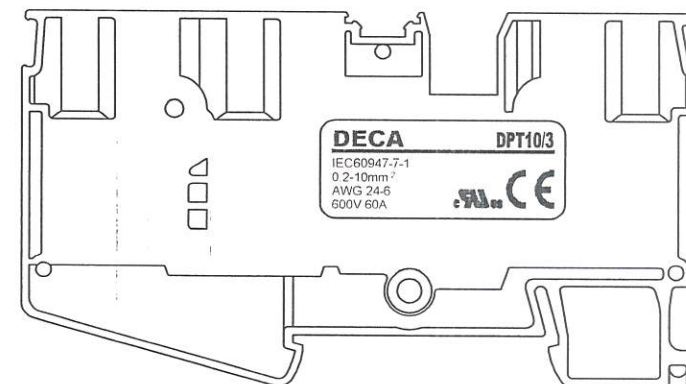


Type No.: DPT10/3 ☐ ☐

COLOR : [](blank) : gray

BU : blue
OG : orange
GN : green
RD : red
YE : yellow

RoHS
Compliant

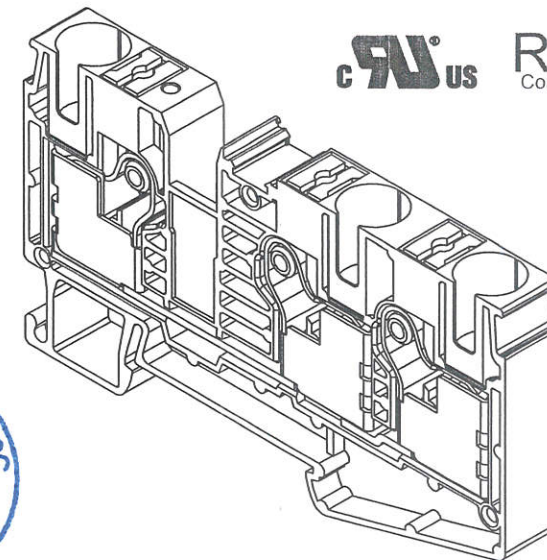

1. Rated current & voltage : 60Amp 600V(UL)
2. Rated current & voltage : 57Amp 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 16mm-18mm
6. Wire size : 24 - 6 AWG (0.2-10mm²)

CONFIRMED & ACCEPTED BY

	Material	QTY	Plating/Finish	Remark
1	Insulating body	Polyamide 66	1	
2	Button	PBT	3	
3	Terminal	COPPER	1	Tin plated
4	Spring	STAINLESS	3	
5	Shell	STAINLESS	3	

DECA® SwitchLab Inc.

PART NAME

UNIT

SCALE

Terminal Blocks

MM

☒

DESIGN

CHECK

APPROVE

DRAWING NO.

SHEET

DATE

DATE

DATE

DPT10/3x

☒

1/1