
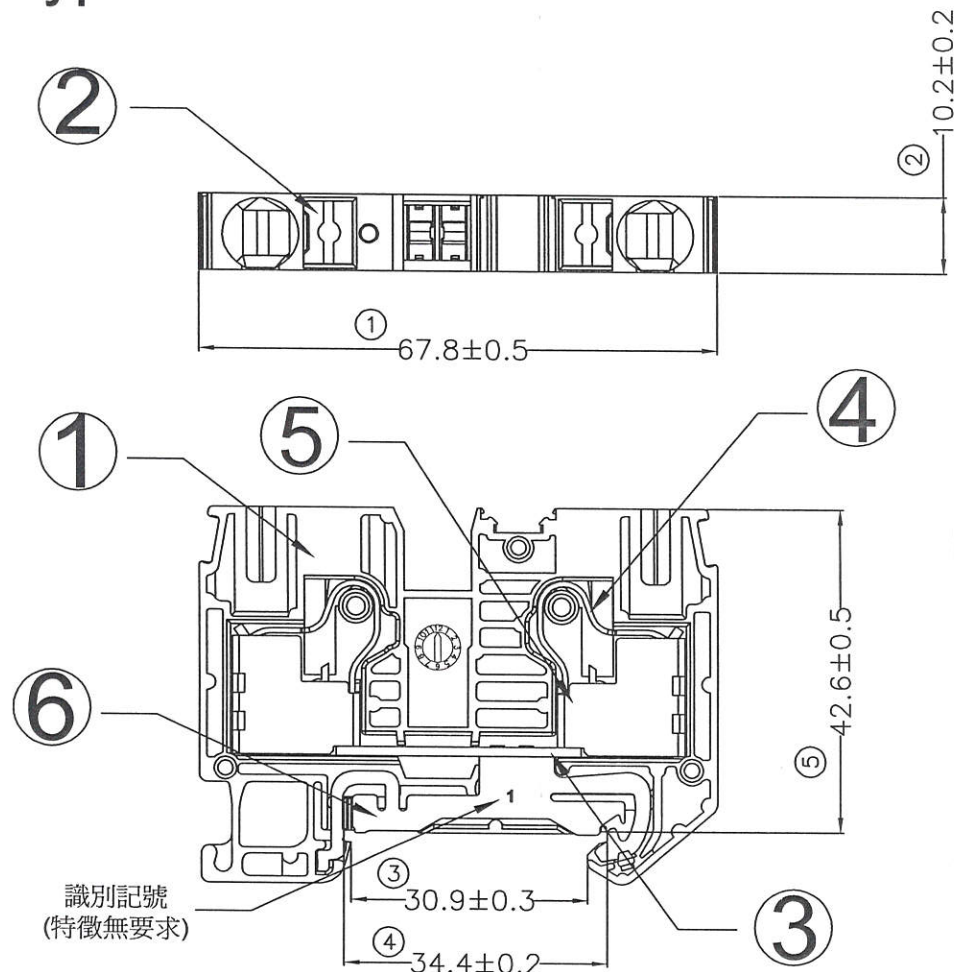
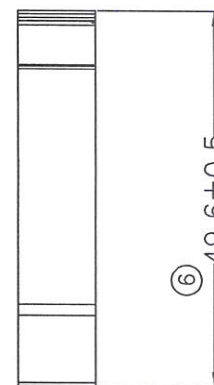
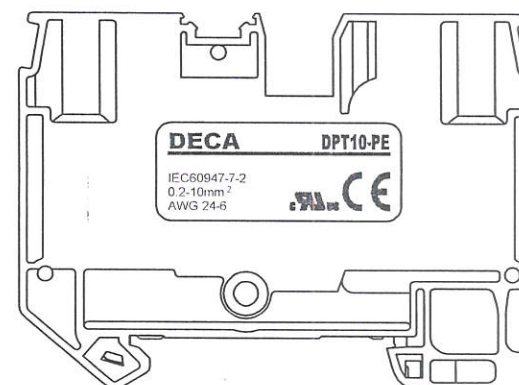


Type No.: DPT10-PE

RoHS
Compliant

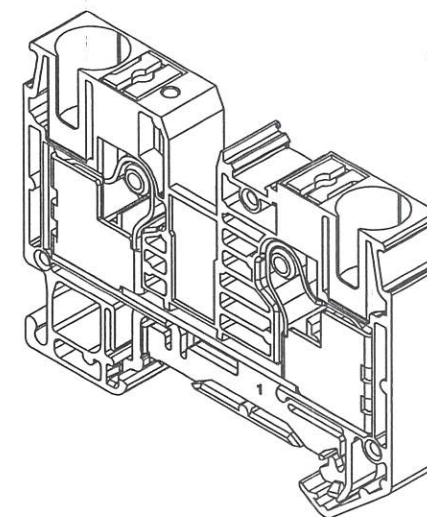

識別記號
(特徵無要求)

1. Rated current & voltage : 600V(UL)
2. Rated current & voltage : 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 16mm-18mm
6. Wire size : 24 - 6 AWG (0.2-10mm²)

CONFIRMED & ACCEPTED BY

	Material	QTY	Plating/Finish	Remark
1	Insulating body	Polyamide 66	1	Green & Yellow(MIX)
2	Button	PBT	2	
3	Terminal	COPPER	11	Tin plated
4	Spring	STAINLESS	2	
5	Shell	STAINLESS	2	
6	Terminal	COPPER ALLOY	3	Tin plated

DECA[®] SwitchLab Inc.

PART NAME

UNIT

SCALE

Terminal Blocks

MM

SHEET

DRAWING NO.

1/1

DPT10-PE

DESIGN

CHECK

APPROVE

DATE

DATE

DATE

2020/11/23

2020/11/23

2020/11/23

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DECA SWITCHLAB INC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. (本圖未經許可 禁止翻印 保留或傳閱 違者必究)

3

4