
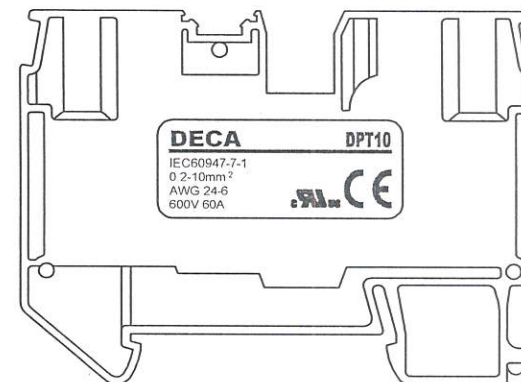
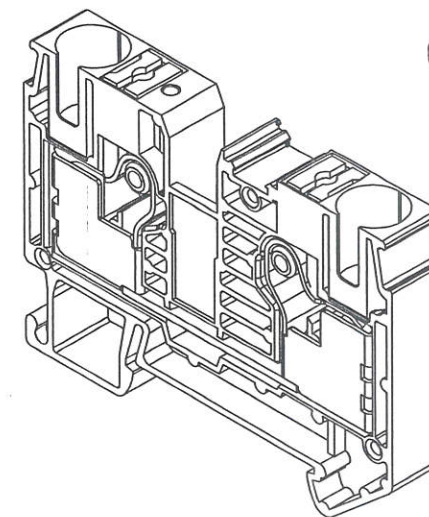


Type No.: DPT10 ☐ ☐

COLOR : [](blank) : gray
BU : blue
OG : orange
GN : green
RD : red
YE : yellow

RoHS
Compliant

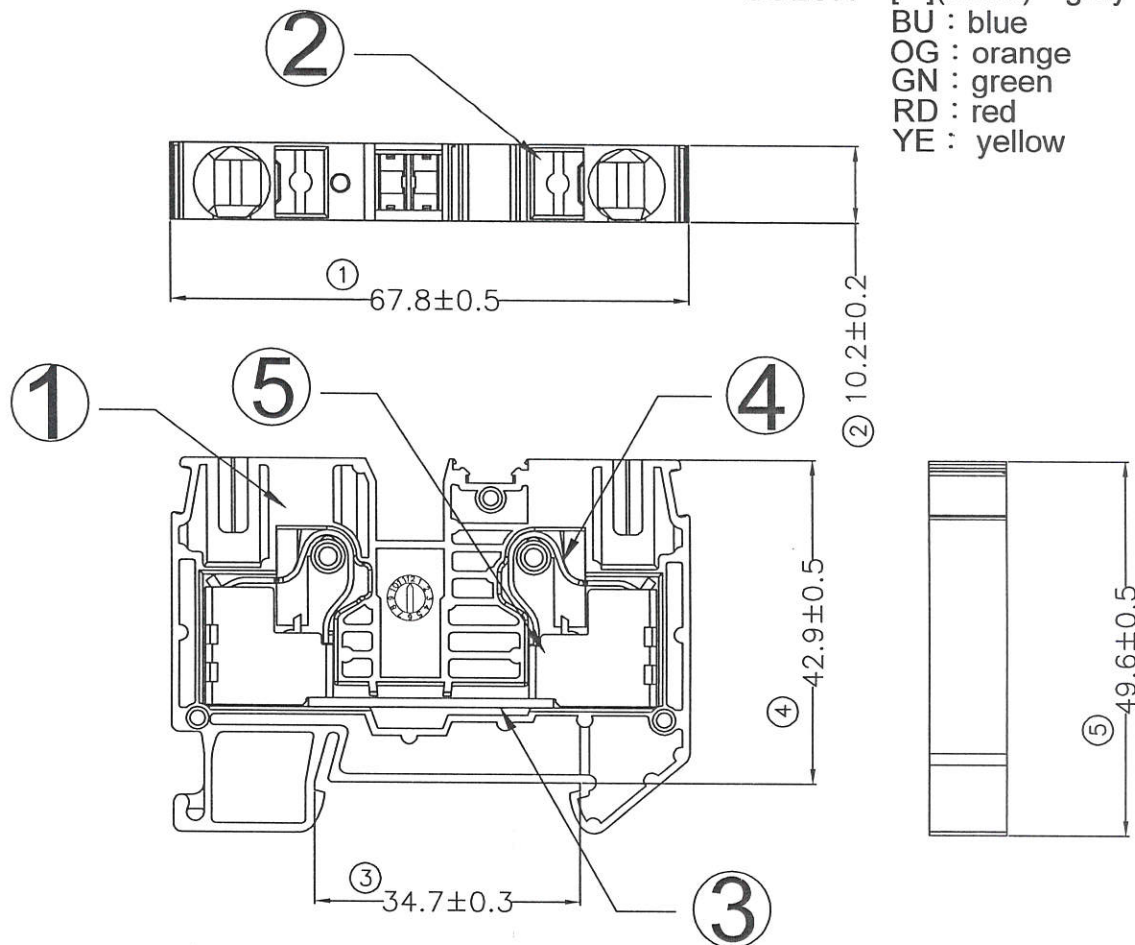

1. Rated current & voltage : 60Amp 600V(UL)
2. Rated current & voltage : 57Amp 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 16mm-18mm
6. Wire size : 24 - 6 AWG (0.2-10mm²)

CONFIRMED & ACCEPTED BY

	Material		QTY	Plating/Finish	Remark
1	Insulating body	Polyamide 66	1		
2	Button	PBT	2		
3	Terminal	COPPER	1	Tin plated	
4	Spring	STAINLESS	2		
5	Shell	STAINLESS	2		

DECA SwitchLab Inc.

DESIGN Galen	CHECK Sam	APPROVE Jelly
DATE 2020/11/23	DATE 2020/11/23	DATE 2020/11/23

PART NAME	UNIT	SCALE
Terminal Blocks	MM	☒
DRAWING NO.		SHEET
DPT10x		1/1