

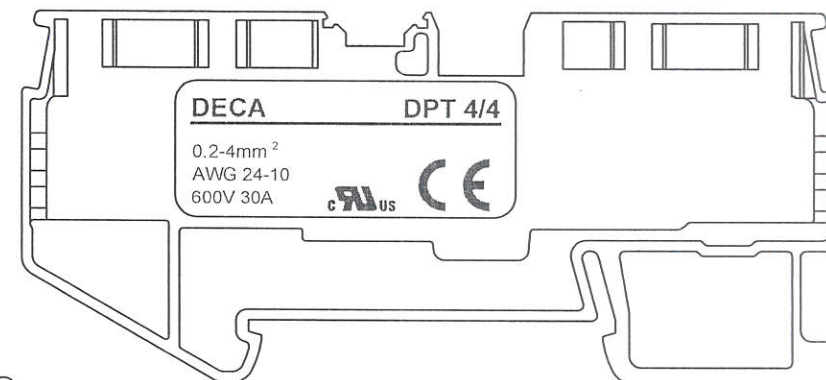
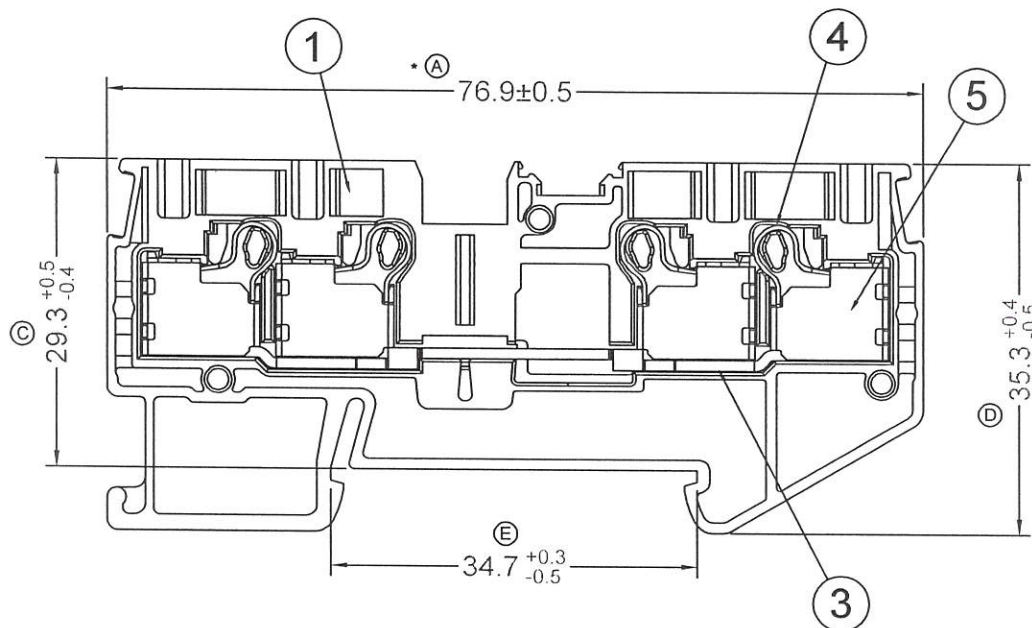


Type No.: DPT4/4 ☐ ☐

COLOR : [](blank) : gray
BU : blue
OG : orange
GN : green
RD : red
YE : yellow

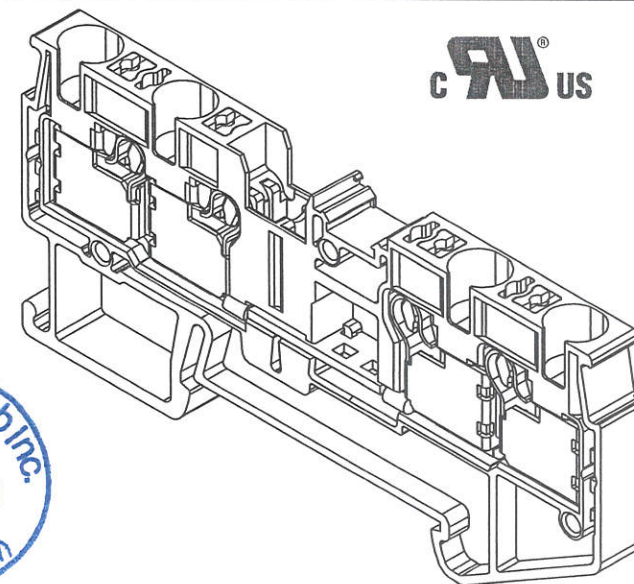

RoHS
Compliant

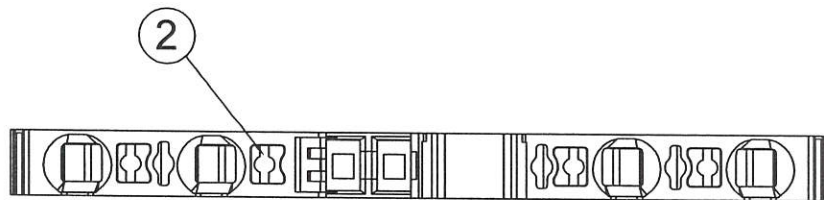

1. Rated current & voltage : 30Amp 600V(UL B,C class)
2. Rated current & voltage : 32Amp 800V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 8mm-12mm
6. Wire size : 24 - 10 AWG (0.2-4mm²)

CONFIRMED & ACCEPTED BY

	Material		QTY	Plating/Finish	Remark
1	Insulating body	Polyamide 66	1		
2	Button	PBT	4		
3	Terminal	COPPER	1	Tin plated	
4	Spring	STAINLESS	4		
5	Shell	STEEL	4	Zinc plated	

DECA SwitchLab Inc.

DESIGN <i>Golden</i>	CHECK <i>Sam</i>	APPROVE <i>7.8.15</i>
DATE 2020/10/05	DATE 2020/10/05	DATE 2020/10/05

PART NAME	UNIT	SCALE
Terminal Blocks	MM	☒
DRAWING NO.		SHEET
DPT4/4 x		1/1