



Type No.: DPT6/3-PE

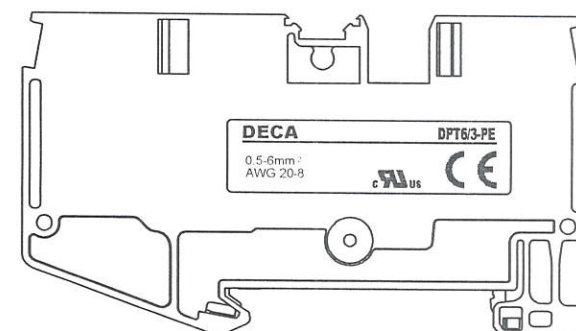


RoHS
Compliant

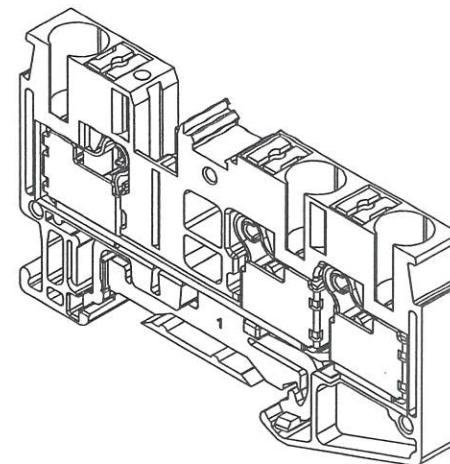

CONFIRMED & ACCEPTED BY				
Material		QTY	Plating/Finish	Remark
1 Insulating body	Polyamide 66	1	Green & Yellow(MIX)	
2 Button	PBT	3		
3 Terminal	COPPER	1	Tin plated	
4 Spring	STAINLESS	3		
5 Shell	STEEL	3	Zinc plated	
6 Terminal	COPPER ALLOY	2	Tin plated	

DESIGN			PART NAME		UNIT	SCALE
DATE			Terminal Blocks		MM	1/1
DRAWING NO.			DPT6/3-PE			

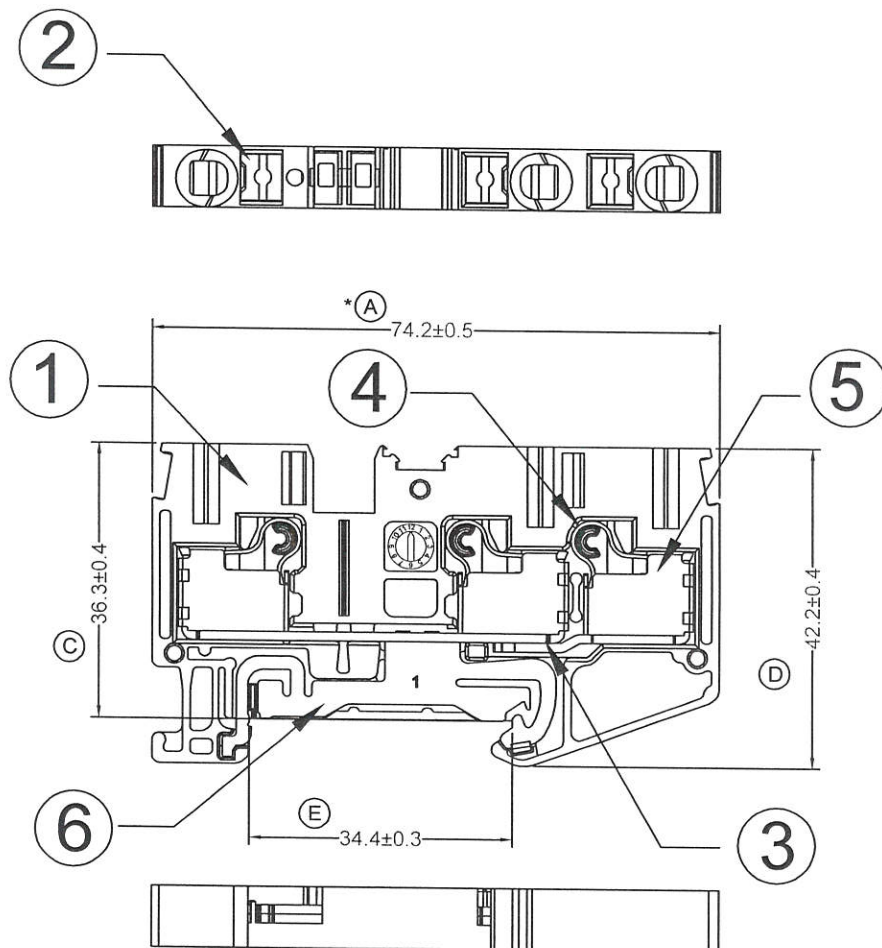

1. Rated current & voltage : 600V(UL)
2. Rated current & voltage : 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 12mm
6. Wire size : 20 - 8 AWG (0.5-6mm²)

B
REV.