

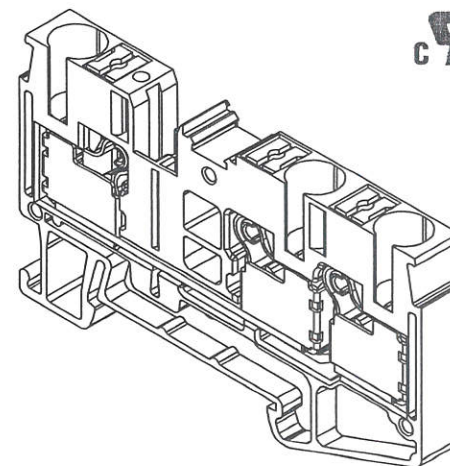


Type No.: DPT6/3 ☐ ☐

COLOR : [](blank) : gray
 BU : blue
 OG : orange
 GN : green
 RD : red
 YE : yellow

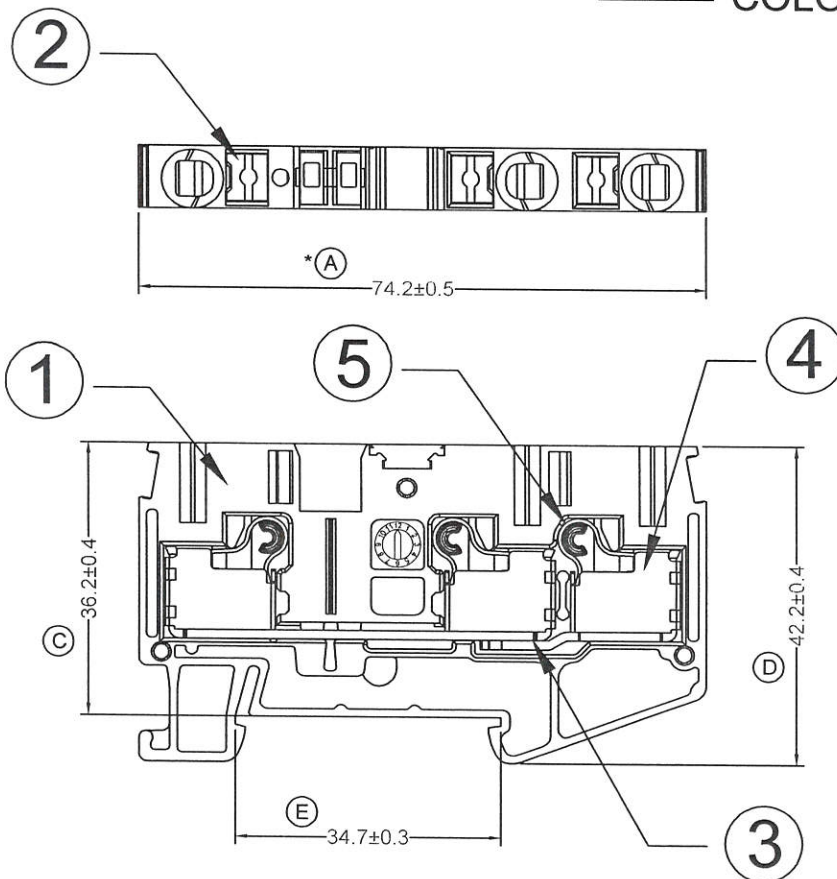

RoHS
Compliant

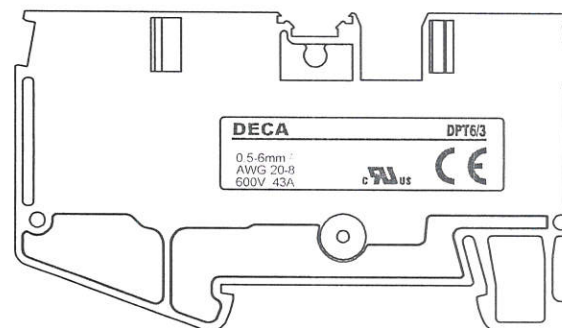

1. Rated current & voltage : 43Amp 600V(UL B,C class)
2. Rated current & voltage : 41Amp 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 12mm
6. Wire size : 20 - 8 AWG (0.5-6mm²)

CONFIRMED & ACCEPTED BY

	Material		QTY	Plating/Finish	Remark
1	Insulating body	Polyamide 66	1		
2	Button	PBT	3		
3	Terminal	COPPER	1	Tin plated	
4	Spring	STAINLESS	3		
5	Shell	STEEL	3	Zinc plated	

DECA SwitchLab Inc.

DESIGN <i>Eden</i>	CHECK <i>Sam</i>	APPROVE <i>g. ellix</i>
DATE 2020/10/05	DATE 2020/10/05	DATE 2020/10/05

PART NAME	UNIT	SCALE
Terminal Blocks	MM	1/1
DRAWING NO.		SHEET
DPT6/3 x		1/1