

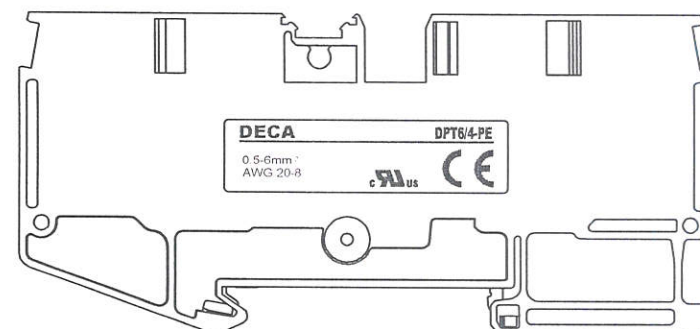


Type No.: DPT6/4-PE

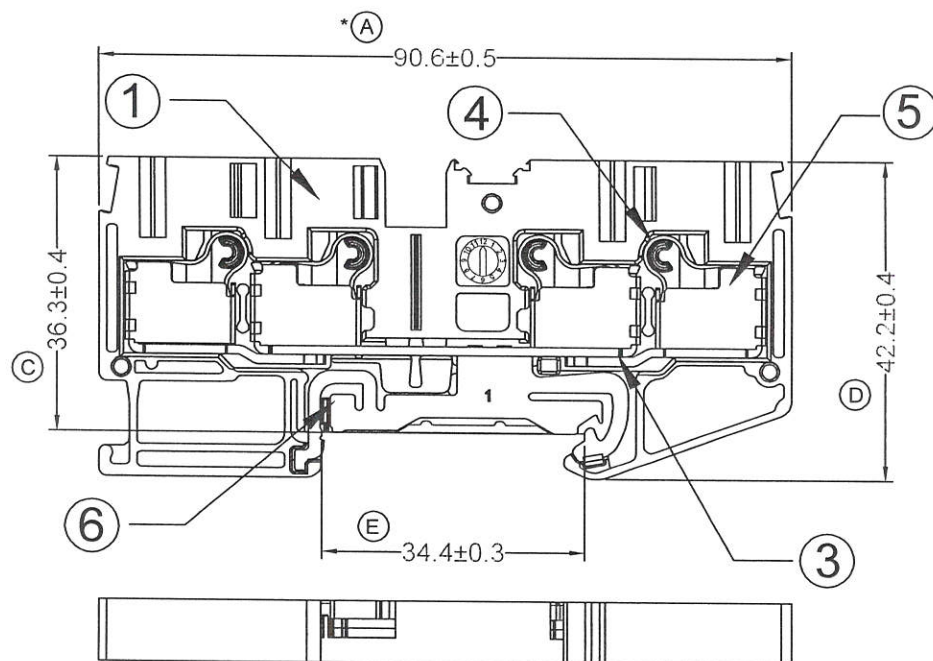

RoHS
Compliant

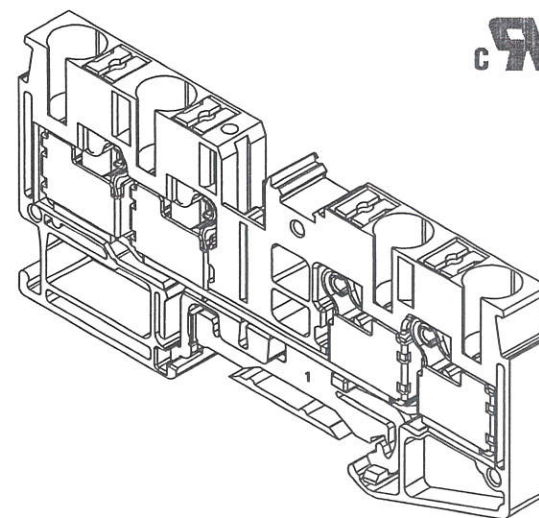

1. Rated current & voltage : 600V(UL B,C class)
2. Rated current & voltage : 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 12mm
6. Wire size : 20 - 8 AWG (0.5-6mm²)

CONFIRMED & ACCEPTED BY

	Material	QTY	Plating/Finish	Remark
1	Insulating body Polyamide 66	1	Green & Yellow(MDX)	
2	Button PBT	4		
3	Terminal COPPER	1	Tin plated	
4	Spring STAINLESS	4		
5	Shell STEEL	4	Zinc plated	
6	Terminal COPPER ALLOY	2	Tin plated	

DESIGN			PART NAME		UNIT	SCALE
6dcm			Terminal Blocks		MM	X
DATE 2020/10/05			DRAWING NO.			SHEET
DATE 2020/10/05			DPT6/4-PE			1/1