

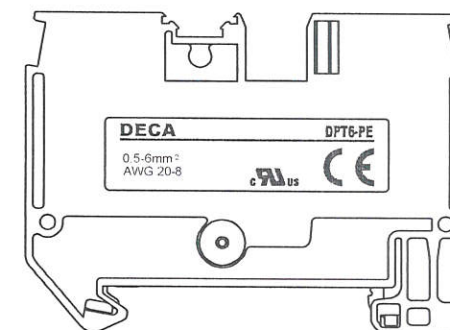
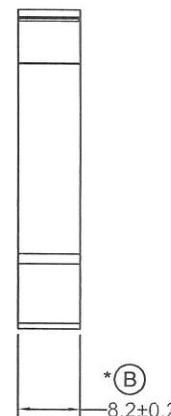
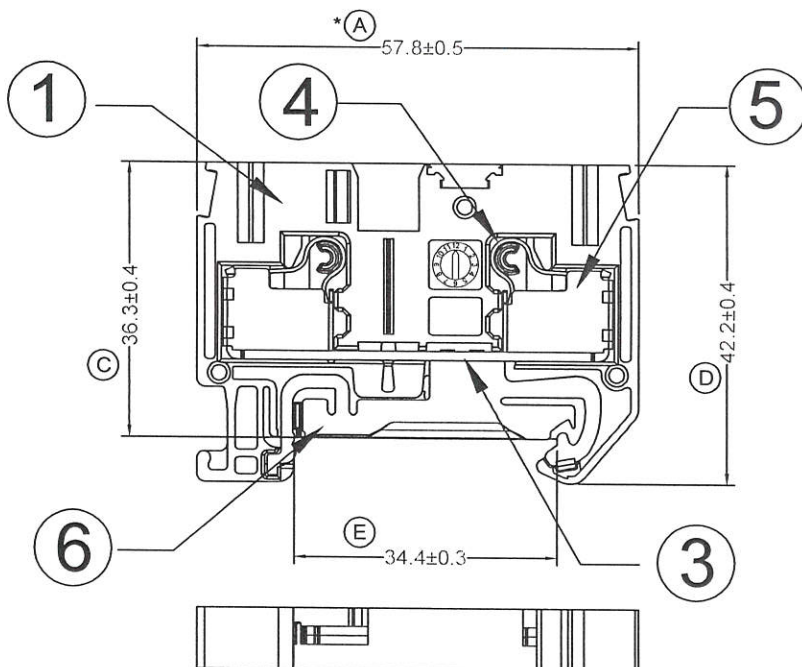


Type No.: DPT6-PE

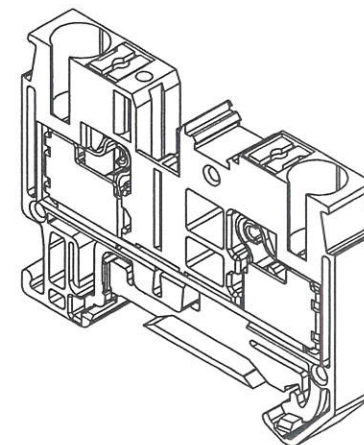

RoHS
Compliant

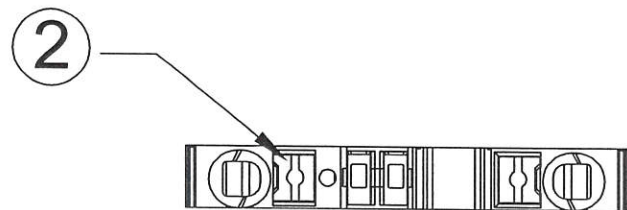

1. Rated current & voltage : 600V(UL)
2. Rated current & voltage : 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 12mm
6. Wire size : 20 - 8 AWG (0.5-6mm²)

CONFIRMED & ACCEPTED BY

	Material	QTY	Plating/Finish	Remark
1	Insulating body	1	Polyamide 66	Green & Yellow(MD)
2	Button	2	PBT	
3	Terminal	1	COPPER	Tin plated
4	Spring	2	STAINLESS	
5	Shell	2	STEEL	Zinc plated
6	Terminal	2	COPPER ALLOY	Tin plated

DECA SwitchLab Inc.

DESIGN	CHECK	APPROVE
DATE	DATE	DATE
2020/10/05	2020/10/05	2020/10/05

PART NAME	UNIT	SCALE
Terminal Blocks	MM	1/1
DRAWING NO.		SHEET
DPT6-PE		1/1