

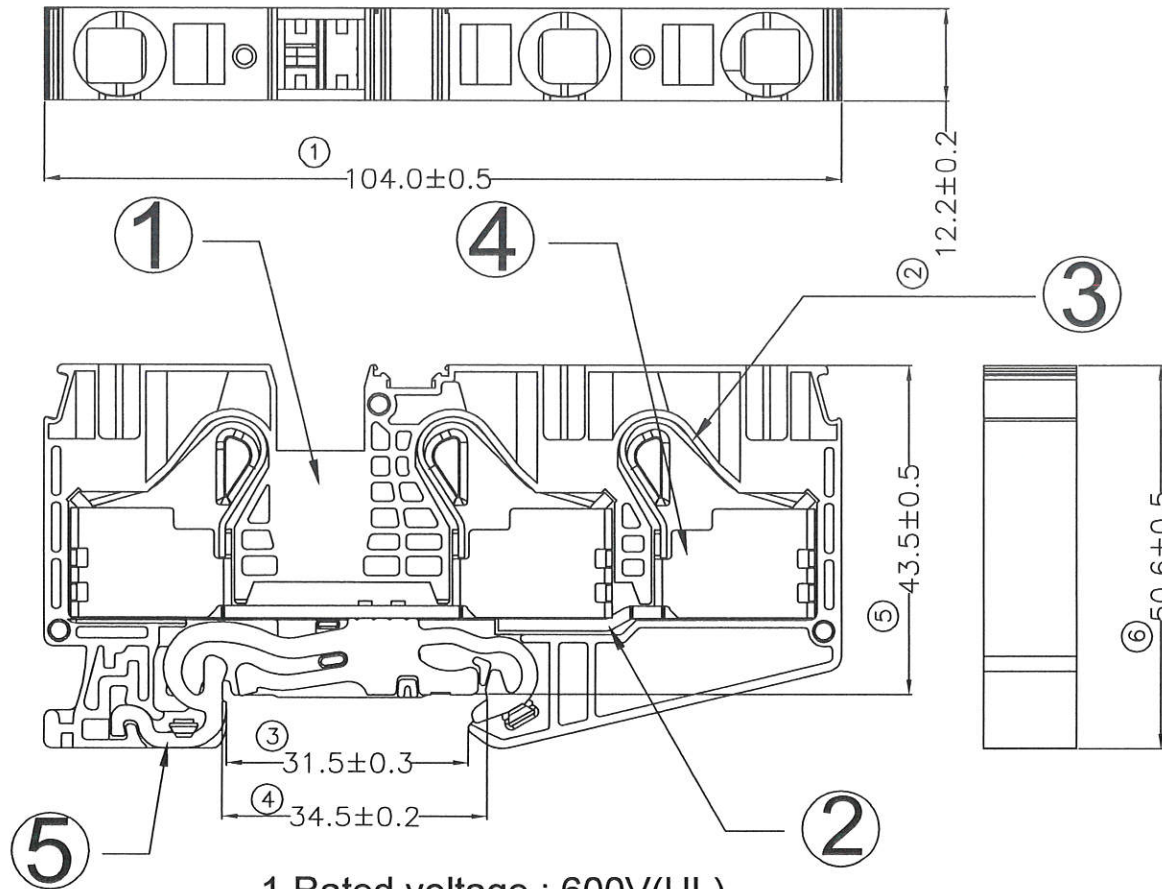


Type No.: DPTN16/3-PE

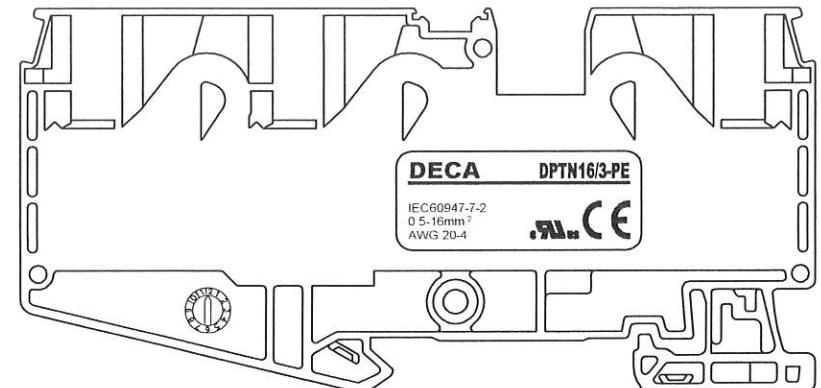

RoHS
Compliant

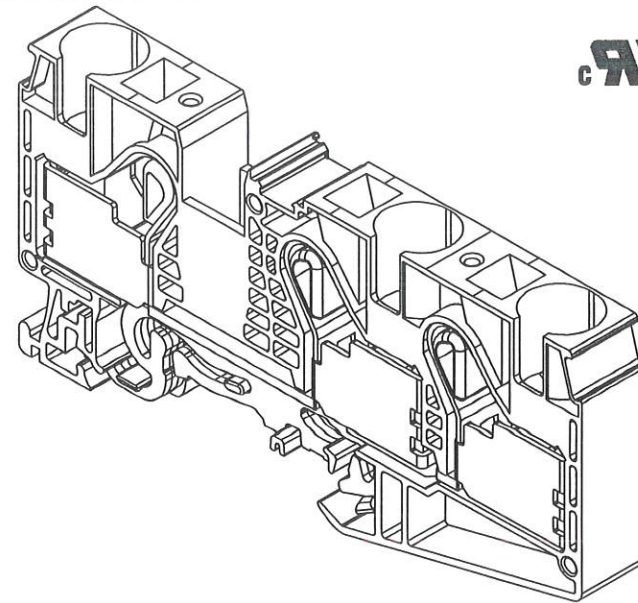

1. Rated voltage : 600V(UL)
2. Rated voltage : 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 16mm -18mm
6. Wire size : 20 - 4 AWG (0.5-16mm²)



CONFIRMED & ACCEPTED BY				
Material		QTY	Plating/Finish	Remark
1 Insulating body	Polyamide 66	1	Green & Yellow(MIX)	
2 Terminal	COPPER	1	Tin plated	
3 Spring	STAINLESS	3		
4 Shell	STEEL	3	Zinc plated	
5 Terminal	COPPER ALLOY	3	Tin plated	

DECA® SwitchLab Inc.			PART NAME	UNIT	SCALE
DESIGN <i>Gelin</i>			Terminal Blocks	MM	1/1
CHECK <i>Sam</i>			DRAWING NO.		
APPROVE <i>g. lli</i>			DPTN16/3-PE		
DATE 2020/12/21	DATE 2020/12/21	DATE 2020/12/21			