

Type No.: DPTN16/3



COLOR : [](blank) : gray


BU : blue

OG : orange




GN : green

RD : red

YE : yellow

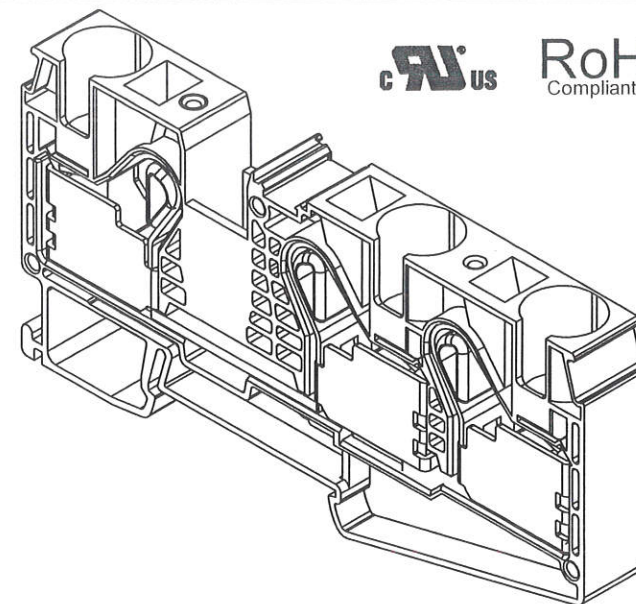

RoHS
Compliant

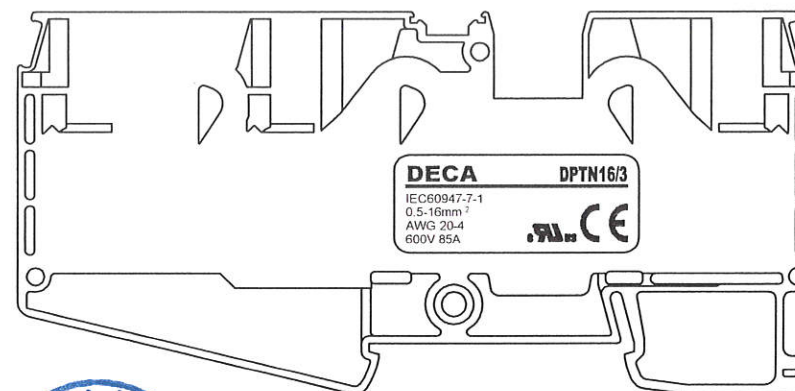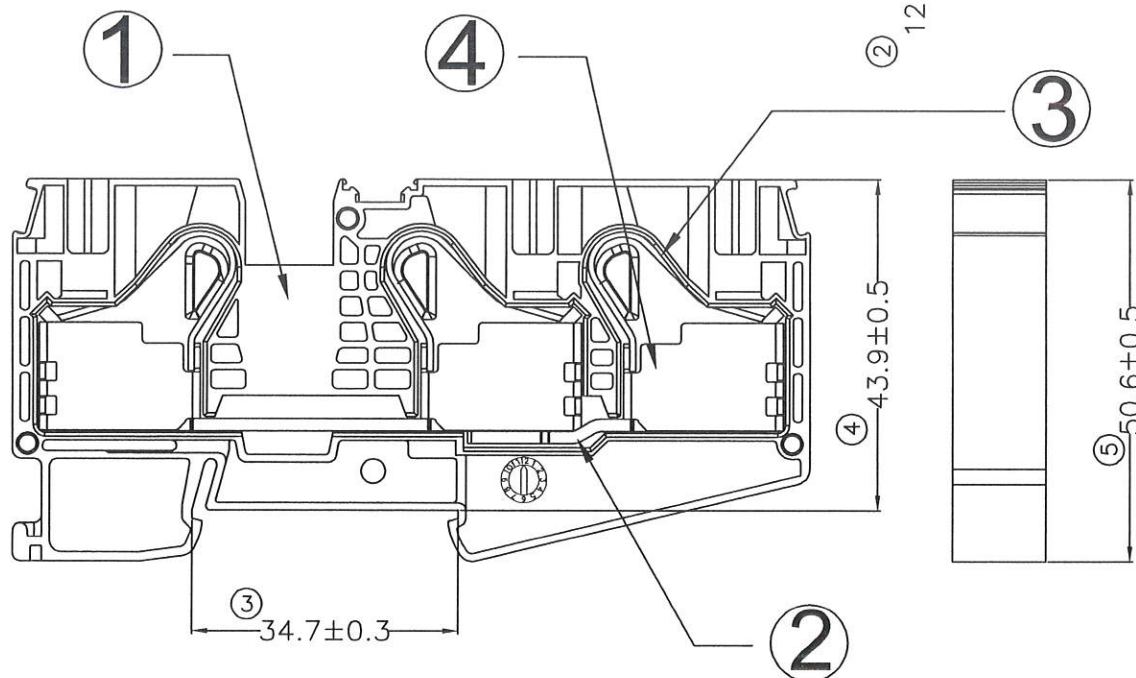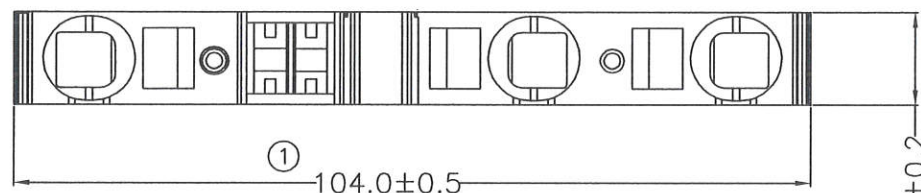

1. Rated current & voltage : 85Amp 600V(UL)
2. Rated current & voltage : 76Amp 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 16mm -18mm
6. Wire size : 20 - 4 AWG (0.5-16mm²)



CONFIRMED & ACCEPTED BY

	Material		QTY	Plating/Finish	Remark
1	Insulating body	Polyamide 66	1		
2	Terminal	COPPER	1	Tin plated	
3	Spring	STAINLESS	3		
4	Shell	STEEL	3	Zinc plated	

DECA® SwitchLab Inc.

PART NAME

UNIT

SCALE

Terminal Blocks

MM

X

DESIGN

CHECK

APPROVE

DRAWING NO.

SHEET

DATE

DATE

DATE

DPTN16/3 x

1/1

2020/12/21

2020/12/21

2020/12/21

B

REV.