

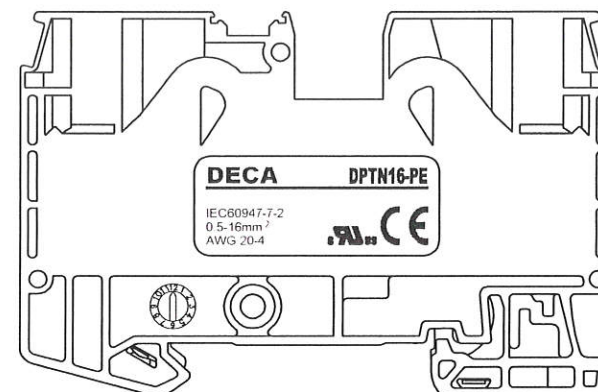
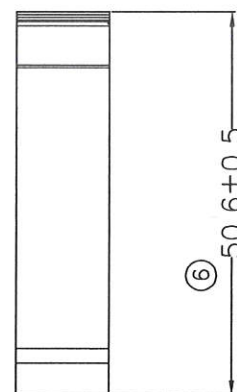
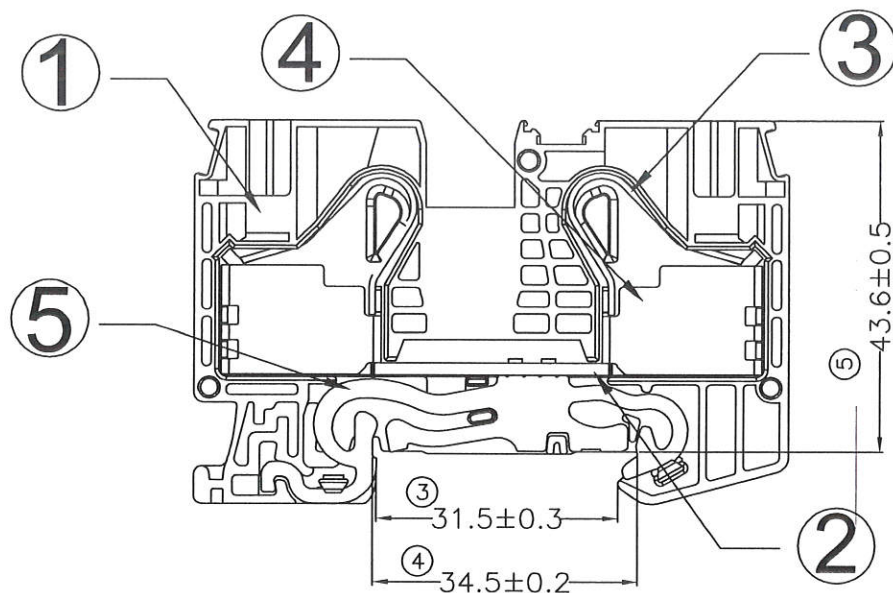


Type No.: DPTN16-PE

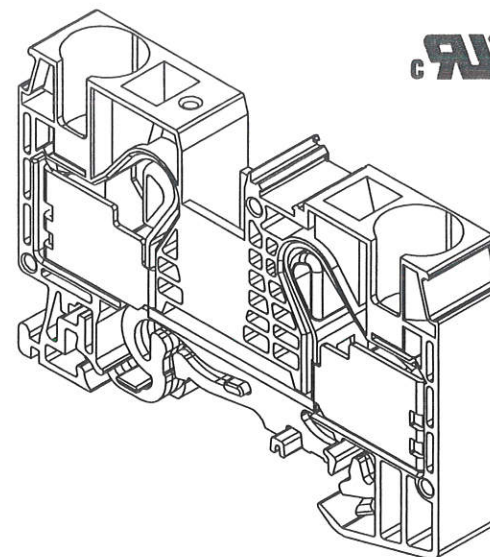

RoHS
Compliant

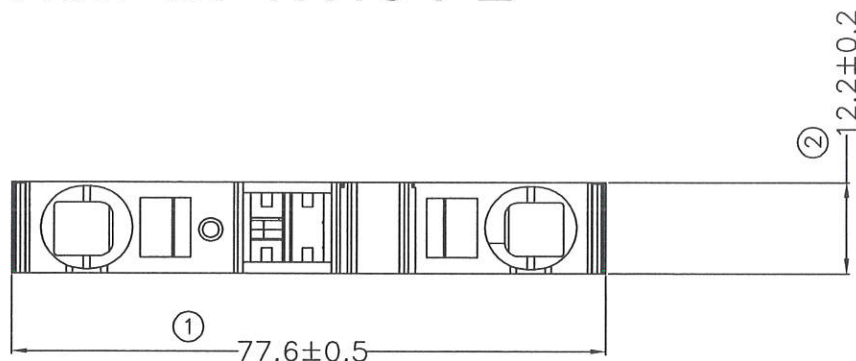

1. Rated voltage : 600V(UL)
2. Rated voltage : 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 16mm-18mm
6. Wire size : 20 - 4 AWG (0.5-16mm²)



CONFIRMED & ACCEPTED BY

	Material		QTY	Plating/Finish	Remark
1	Insulating body	Polyamide 66	1	Green & Yellow(MIX)	
2	Terminal	COPPER	1	Tin plated	
3	Spring	STAINLESS	2		
4	Shell	STEEL	2	Zinc plated	
5	Terminal	COPPER ALLOY	3	Tin plated	

DECA [®] SwitchLab Inc.			PART NAME	UNIT	SCALE
DESIGN <i>Golen</i>			Terminal Blocks	MM	1/1
CHECK <i>Sam</i>			DRAWING NO.		
DATE 2020/12/21			DPTN16-PE		
APPROVE <i>elrik</i>					
DATE 2020/12/21					