
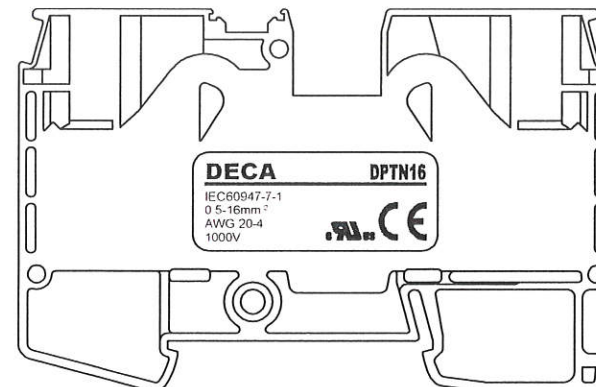
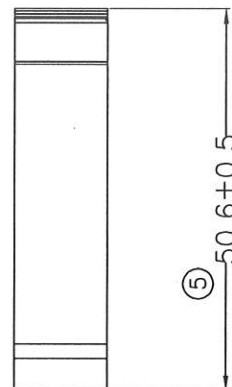
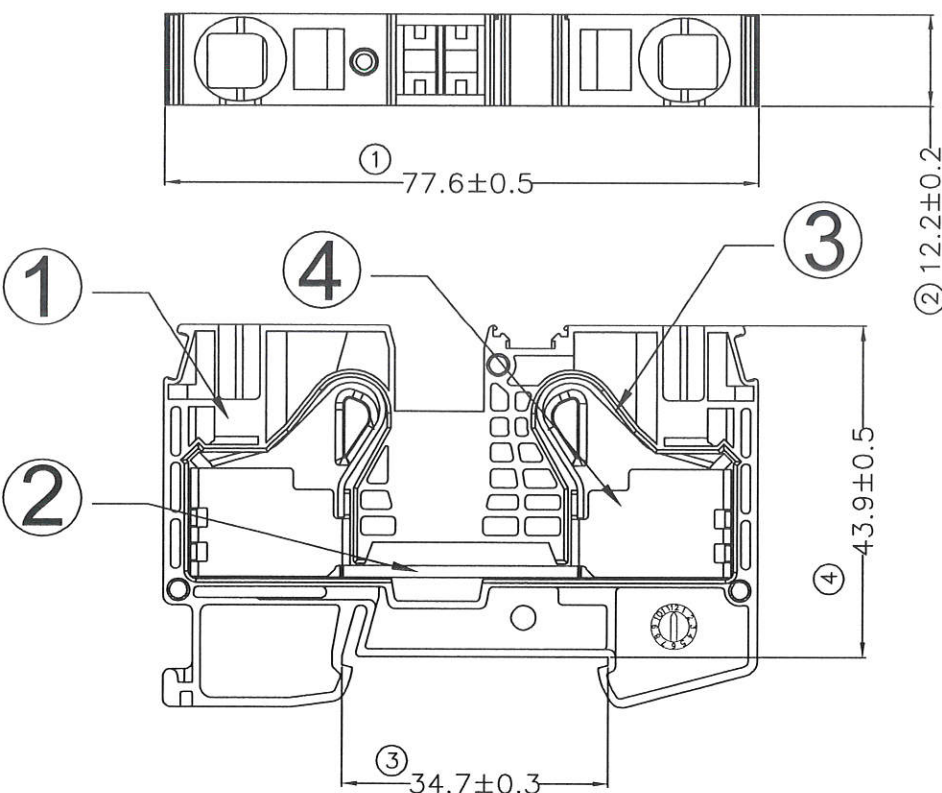


Type No.: DPTN16

COLOR : [](blank) : gray
 BU : blue
 OG : orange
 GN : green
 RD : red
 YE : yellow

RoHS
 Compliant

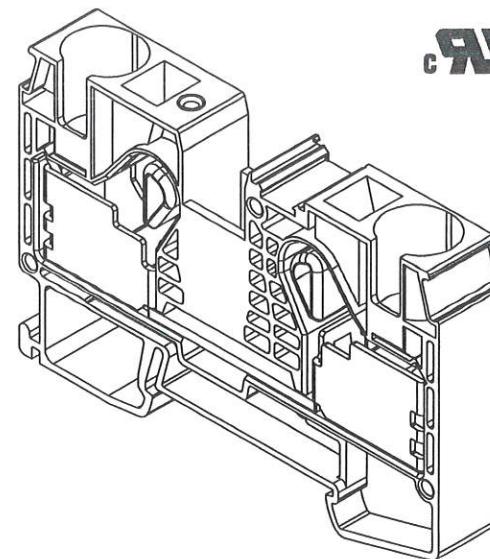

1. Rated current & voltage : 85Amp 600V(UL)
2. Rated current & voltage : 76Amp 1000V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 16mm-18mm
6. Wire size : 20 - 4 AWG (0.5-16mm²)



CONFIRMED & ACCEPTED BY				
Material		QTY	Plating/Finish	Remark
1 Insulating body	Polyamide 66	1		
2 Terminal	COPPER	1	Tin plated	
3 Spring	STAINLESS	2		
4 Shell	STEEL	2	Zinc plated	

DECA [®] SwitchLab Inc.			PART NAME	UNIT	SCALE
DESIGN <i>Eden</i>			Terminal Blocks	MM	1/1
CHECK <i>Sam</i>			DRAWING NO.		
APPROVE <i>J. Elie</i>			DPTN16 x		
DATE 2020/12/21	DATE 2020/12/21	DATE 2020/12/21			