

COB LED STRIP




320
LEDs/M

产品特点

- 1.无光斑，无暗区，光线柔和
- 2.抗静电等级（MIL – STD – 883 – e):HMB等级（2000 – 4000V)
- 3.最大发光角度可达180度
- 4.可剪切，沿着剪切线可自由剪切和焊接



结构和参数

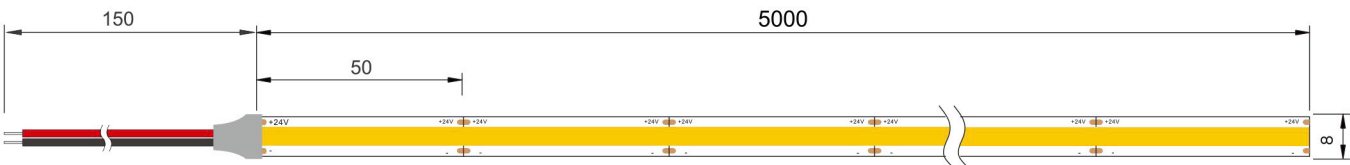

参数

序号	型号	规格	参数					
			剪刀口	色温 (K)	功率 (W)	光通量 (LM)	光效 (LM/W)	显指
1	CFC320A4-BW01	320D24V8mm	5cm	3000	12	1020	85	90
2	CFC320A4-BN01	320D24V8mm		4000		1060	88	90
3	CFC320A4-BT01	320D24V8mm		6000		1020	85	90
4	CFA320A4-BW01	320D12V8mm	2.5cm/5cm	3000	11	860	85	90
5	CFA320A4-BN01	320D12V8mm		4000		890	88	90
6	CFA320A4-BT01	320D12V8mm		6000		860	85	90


产品连接图




灯带两端分别插入到连接卡扣，
确保卡扣的焊接面同灯带一致。



完全插入后，
确保灯带两端紧紧连接在一起。

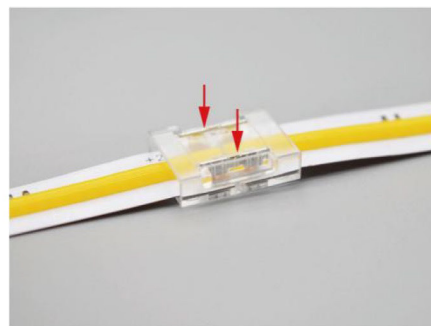

用镊子按压将卡扣确保接入到位，
连接完成。

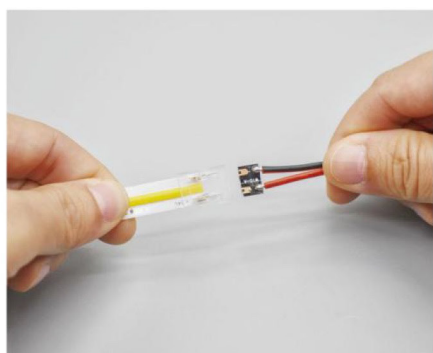

把灯带插入带有电源线的卡扣底
部确保卡扣的焊接面同灯带一致。




同时确保两端完成连接用镊子按压卡住，
确保插入到位，链接完成。

滴胶

(01型)



IP20




热收缩管

(02型)




IP65



(03型)




IP67





(04型)



IP68




注意事项

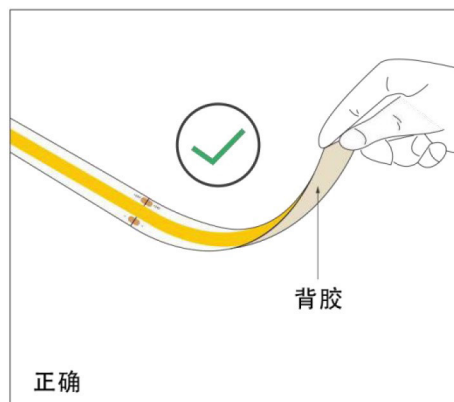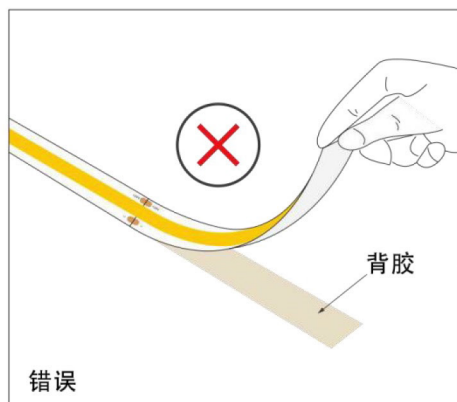


灯带背胶撕掉时，确保背胶附着于灯带表面，否则灯带会被破坏

当安装灯带时，请注意安装方法，灯带可以弯曲，但不能扭曲，如下图所示：

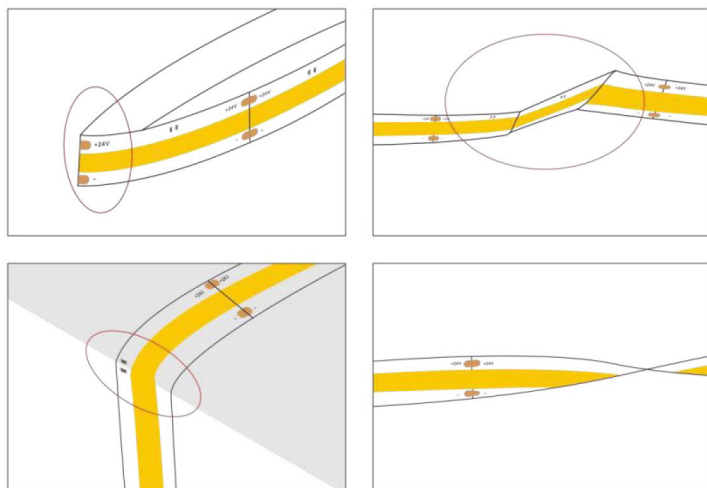

扭曲（错误）

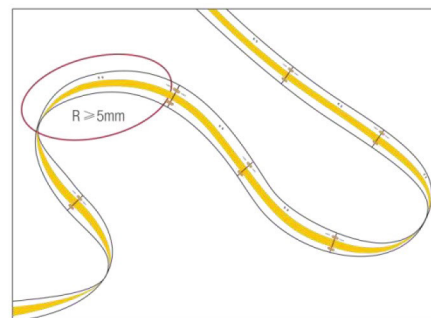


弯曲（正确）

➤ 灯带是低压产品所以必须使用电源（转换器）
请不要将灯带直接连接到110v电源或220v电压，否则灯带将会烧坏。

➤ 使用之前需清洁安装表面，保证胶水的牢固性
电路的连接必须由专业人员操作。

线路连接图

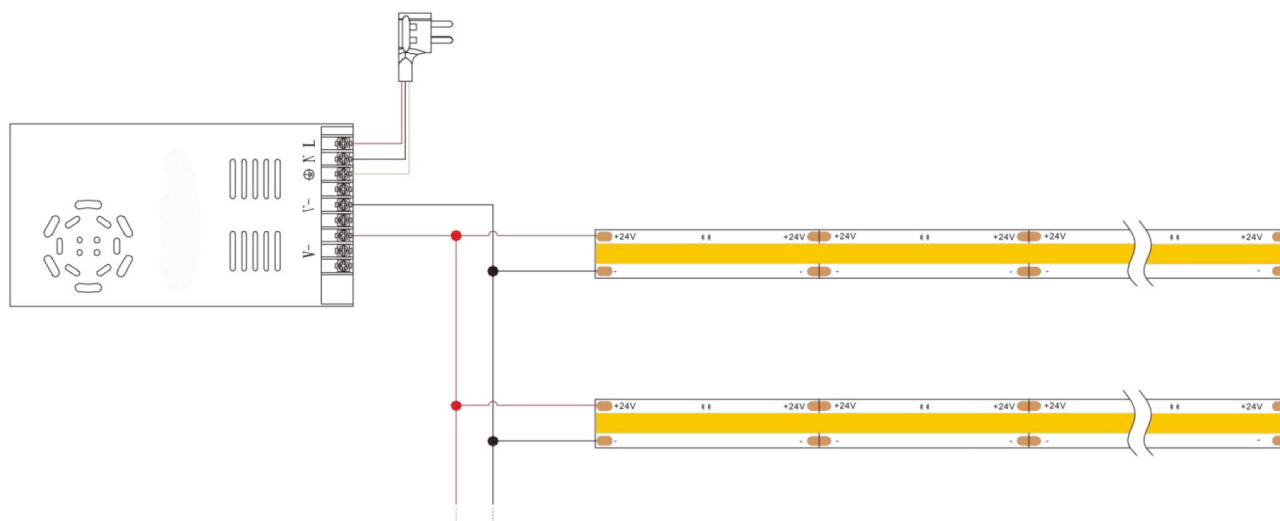

包装

