


若因配合認證機構的要求而變更標示, 將不另行通知。


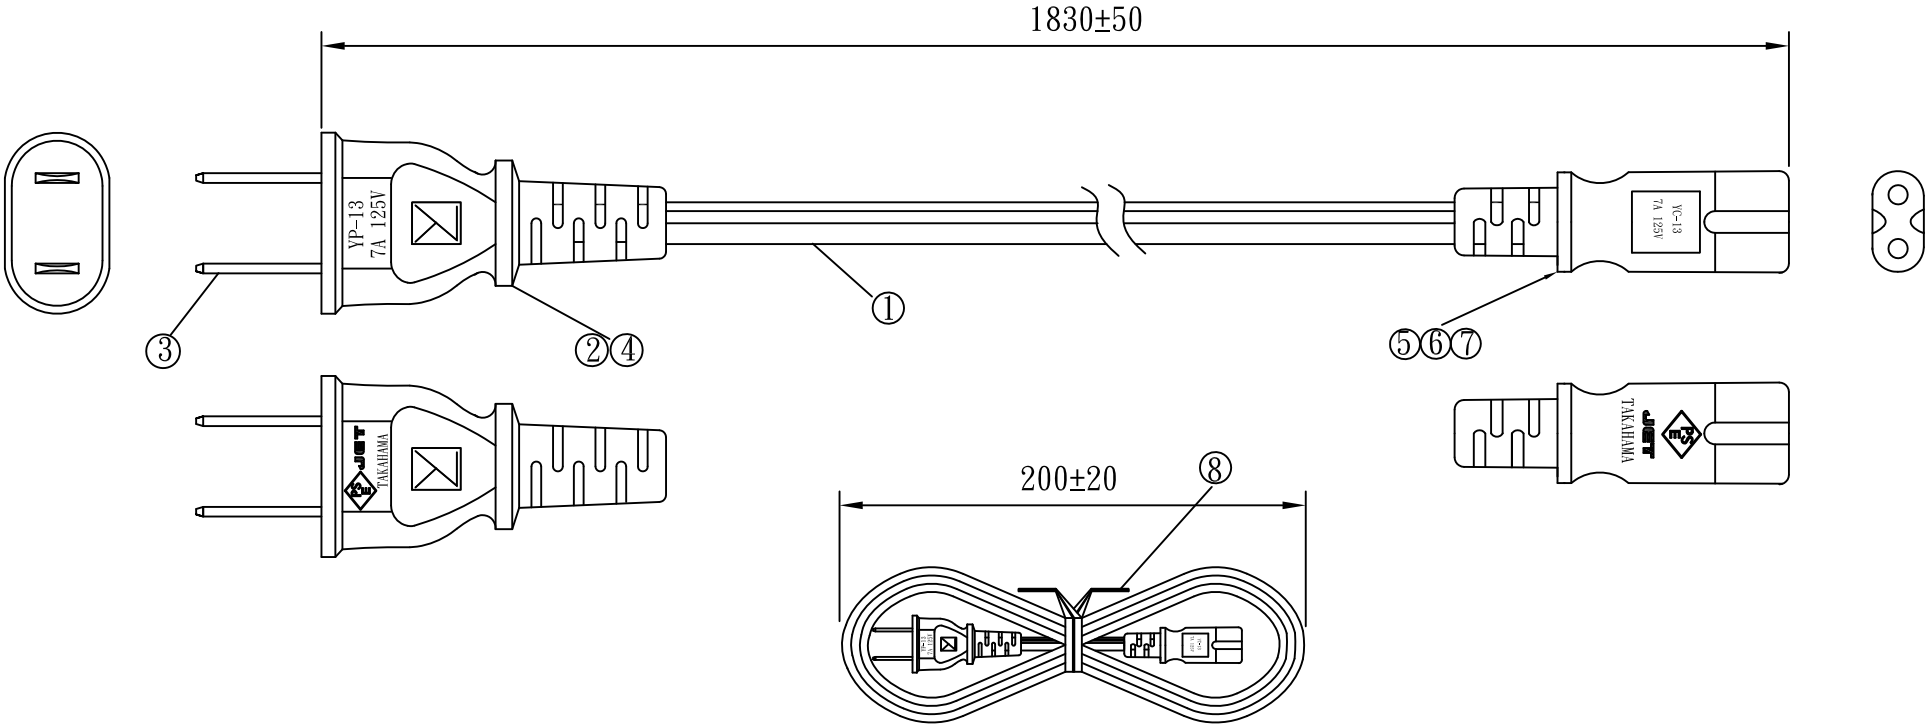


線材印字：

<PS>E JET TAKAHAMA VFF 2X0.75mm² 20XX -F-





序號	品名規格	用量	備注
1	PSE規格:VFF 2x0.75mm ² 黑色	1PC	1810±20(YL)
2	YP-13 50P黑色膠料	15g/PC	
3	銅片:97675BS-1	2PCS	
4	兩插內模	1PC	
5	三爪磷青銅管	2PCS	
6	"8"字內模	1PC	
7	YC-13 50P黑色膠料	9g/PC	
8	迷你帶:L=130mm 黑色	1PC	

核准：		審核：		業務：		東莞永力電業有限公司 YUNG LI CO.,LTD			
一般寸法公差： >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle:±1°	制圖	SUKI	日期	18.09.09	客 戶				
	型號	(PSE)YP-13/YC-13			客戶料號				
	圖號	CY-P0037	版本	B	材 質	P. V. C	單位	mm	
					單重(g)				

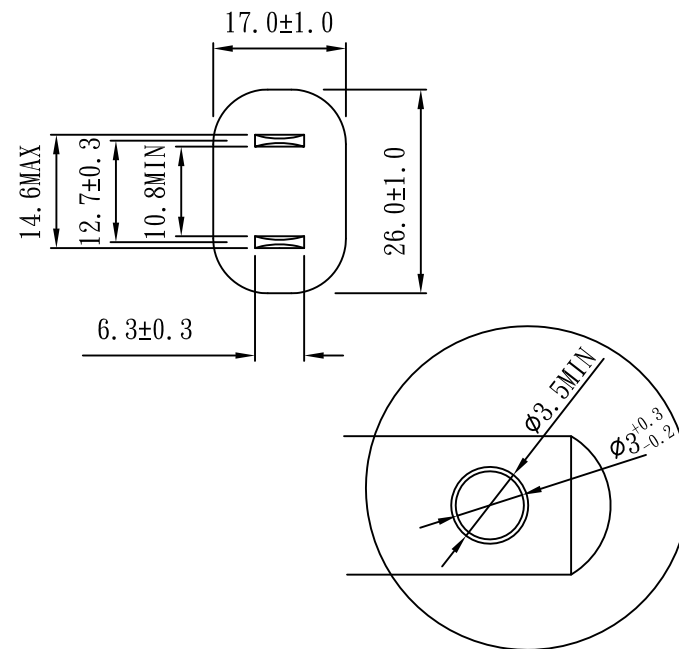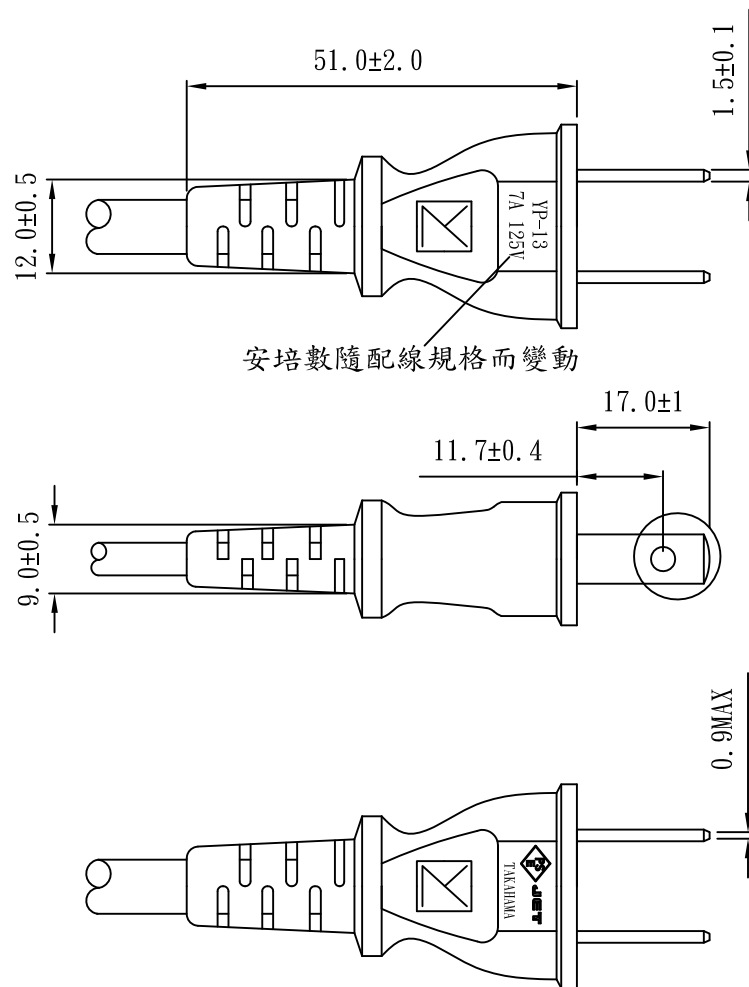

線號	安培數列表	
0.75	7A 125V~	
1.25	12A 125V~	
2.0	15A 125V~	

核准：		審核：		業務：		東莞永力電業有限公司 YUNG LI CO.,LTD			
一般寸法公差： >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle:±1°	制圖	黃海燕	日期	18.09.06	客 戶				
	型號	YP-13(PSE)			版 本	C	單 重		
	圖號	MP-P13000			材 質	P. V. C	單位	mm	
					比 例	1:1			

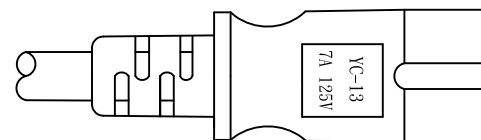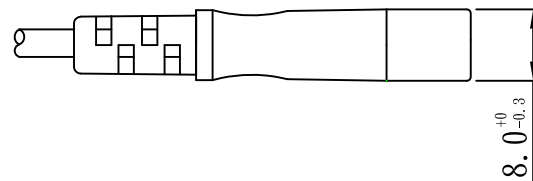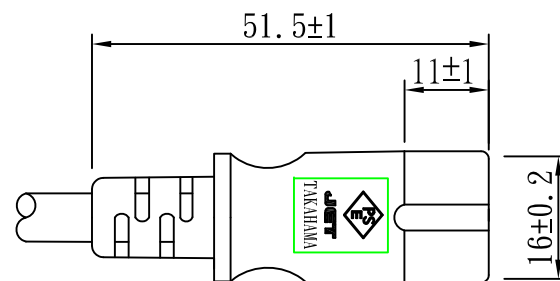

一般寸法公差: >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	核准		日期		永力電業有限公司 YUNG LI CO., LTD.			
	審核		日期					
	制圖	羅生英	日期	12.05.24				
	型號	YC-13(PSE)			料號			
	圖號				材質	P. V. C	單位	mm
					比例	1:1		

YUNG LI CO., LTD

SPECIFICATION

Yung-Li	Style	PVC FLEXIBLE CORDS	Document No
2005.09.22			
Edition	Size	PSE VFF 2 X 0.75mm²	Page
A			1/2

1. Standard: JIS C3306

2. Construction & Dimension

Item		Specification
Conductor	Size	2 X 0.75 mm ²
	Material	Annealed Bare Copper
	Construction	30/ ϕ 0.18±0.008
Insulation	Material	PVC
	Minimum Average Thickness	0.72mm
	Minimum Thickness at any point	0.64mm
	Diameter	2.7 ± 0.1/5.4±0.15 mm
	Color	Any Color
Core Assembly	Core Twist	2-Core
	Filler	NA
	Assembly Pair	NA
Taping	Mylar Foil	NA
Shielded	A1-Mylar Foil	NA
Drain	Material	NA
	Construction	NA
Jacket	Material	NA
	Minimum Average Thickness	NA
	Minimum Thickness at any point	NA
	Overall Diameter(Approx)	NA
	Color	any color

Marking:

<PS> E JET TAKAHAMA VFF 2X 0.75mm² 20XX -F-

YUNG LI CO., LTD

SPECIFICATION

Yung-Li	Style	PVC FLEXIBLE CORDS	Document No
2005.09.22			
Edition	Size	PSE VFF 2 X 0.75mm²	Page
A			2/2

3. Electrical & Physical Properties

Item			Specification
Rating Voltage			300V
Conductor resistance(AT 20°C)			24.4Ω/Km MAX
Insulation Resistance(AT 20°C)			5.0MΩ/Km Min
Dielectric Strength			AC 1.0 KV / 1min No Break
Spark Test			5KV/0.15sec
Insulation	Unaged	Tensile Strength	1.02 kgf/mm ² min
		Elongation	100% Min
	Aged	Tensile Strength	Min 85% (100°Cx48hrs)
		Elongation	Min 80% (100°Cx48hrs)
Jacket	Unaged	Tensile Strength	NA
		Elongation	NA
	Aged	Tensile Strength	NA
		Elongation	NA
Deformation Test			120±3°Cm X 1hr ≤ 50%
Cold Bend Test			-10°C x 1hr No Crack
Heat Shock Test			120±3°C x 1hr No Crack

Graph:

