

250 MADE IN CHINA
若因配合認證機構的要求而變更標示,將不另行通知。



SASO 2203 MS 589/A



Technical drawing of the YUNG LI YP-61A power cord, showing dimensions and components.

Overall length: 1830 ± 50 mm.

Coiled section diameter: 200 ± 20 mm.

Plug specifications: 10A 250V~.

Internal wiring color code:

- Green/Yellow (Ground)
- Blue (Neutral)
- Brown (Live)

Product markings and labels:





- YUNG LI
- YP-61A
- RS 1363/A
- MADE IN CHINA
- MS 589/A
- SASO 2203
- FUSED
- SAFETY MARK
- 180890-12 (for mains plug)
- SS 145/A
- UK 13A 250V~
- YUNG LI
- YC-12
- NSW22012
- 10A 250V~

Each box contains one external label (100 mm wide).

QR code and recycling symbol are included.

序號	品 名 規 格	用量	備 注
1	線材:H05VV-F 3G 0.75mm ² 黑色四字	1PC	1800±10(YL)
2	YP-61A 60P黑色膠料	54g/PC	
3	黑色英式架:ZH168/M87053-1B/B5	1PC	
4	黑色保險絲蓋:T0-168/P87053E-YLB	1PC	
5	英式架壓力蓋:168-02/P87053B1-B	1PC	
6	10A保險絲(UBL8808-10A) TOWELL	1PC	
7	白色英式護套	1PC	
8	迷你帶:L=130mm 黑色	1PC	
9	97740BS-0端子	3PCS	
10	品字尾插	1PC	
11	YC-12 50P 黑色膠料	18g/PC	
12	GCC外箱標籤:100*100MM	1PC	包裝打印

核准：		審核：		業務：		東莞永力電業有限公司 YUNG LI CO.,LTD			
一般寸法公差： >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle:±1°	制圖	黃 方	日期	21.03.19	客 戶				
	型號	YP-61A/YC-12			客戶料號				
	圖號	CY-B0408-26	版本	C	材 質	P. V. C	單位	mm	
					單重(g)				

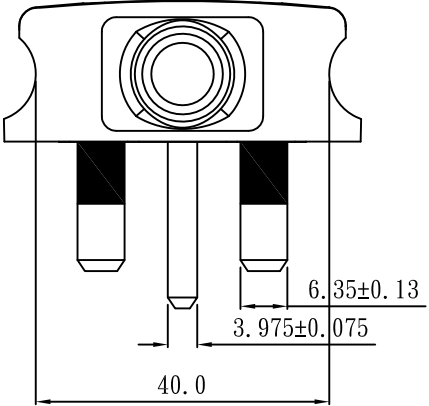
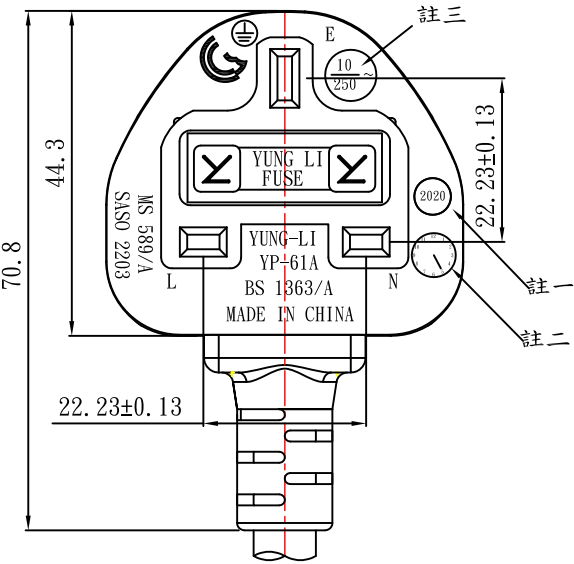
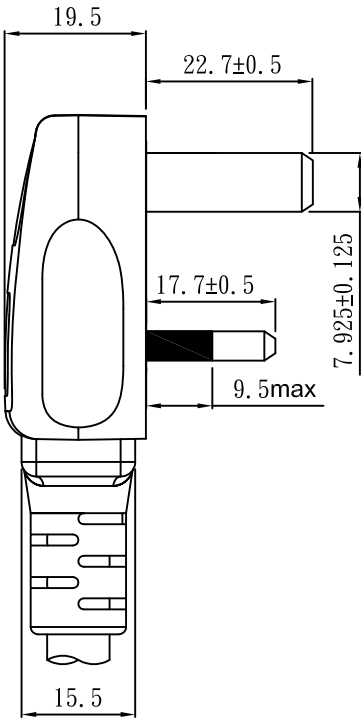
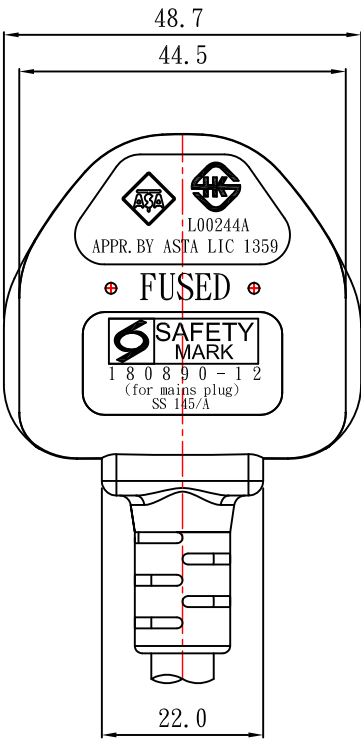


註一:為生產之年份(須每年更換)
註二:為生產之月份指向(須每月變動)
註三:為安培數(依需求而變動)

一般寸法公差: >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	核准		日期		東莞永力電業有限公司 YUNG LI CO., LTD.			
	審核		日期					
	制圖	周淑萍	日期	19.02.13				
	型號	YP-61A			料號			
	圖號	CY-P61AB			材質	PVC	單位	mm
					比例	1:1		

UK
CA

NSW 22012

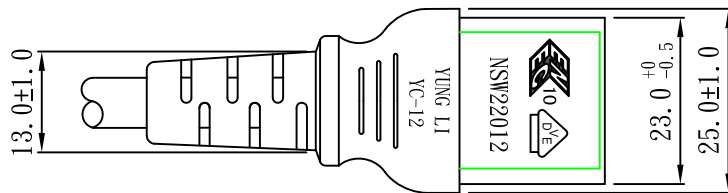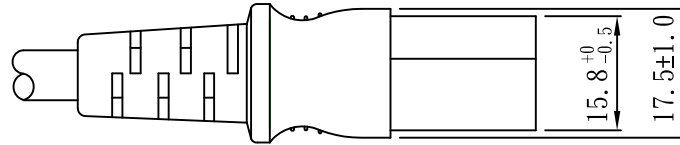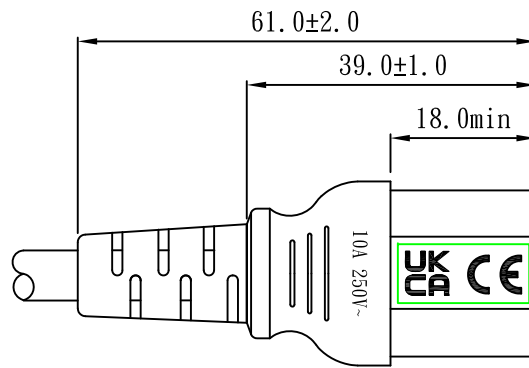

核准:		審核:		業務:		東莞永力電業有限公司 YUNG LI CO.,LTD			
一般寸法公差: >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle:±1°		制圖	黃海燕	日期	21.02.08	客 戶			
		型號	YC-12(UKCA)			版 本	B	單 重	
		圖號	MC-B12000			材 質	P.V.C	單位	mm
						比 例	1:1		

YUNG LI CO., LTD

SPECIFICATION

Yung Li	Style	PVC FLEXIBLE CORDS	Document No
2019.04.23			
Edition	Size	H05VV-F 3G 0.75mm² 凹字	Page
A			1/2

1. Standard: IEC 227 IEC228

2. Construction & Dimension

Item		Specification
Conductor	Size	3G 0.75mm ²
	Material	Annealed Bare Copper
	Construction	24/ § 0.2±0.01
Insulation	Material	PVC
	Minimum Average Thickness	0.60mm
	Minimum Thickness at any point	0.44mm
	Diameter	2.35 ± 0.10
	Identification	Blue,Brown, Yellow/Green
Core Assembly	Core Twist	3-Core
	Filler	NA
	Assembly Pair	NA
Taping	Mylar Foil	NA
Shielded	A1-Mylar Foil	NA
Drain	Material	NA
	Construction	NA
Jacket	Material	PVC
	Minimum Average Thickness	0.8mm
	Minimum Thickness at any point	0.58mm
	Overall Diameter(Approx)	6.7 ± 0.2
	Color	BLACK

Marking:

☒ Yung Li Co., Ltd. H05VV-F 3G 0.75mm² <VDE> NF-USE 1347  KEMA-KEUR  CEBEC <OVE>
     IEMMEQU SAA-190646-EA  A004049 60227 IEC 53(RVV) 300/500V  SU01027-4002

YUNG LI CO., LTD

SPECIFICATION

Yung Li	Style	PVC FLEXIBLE CORDS	Document No
2019.04.23			
Edition	Size	H05VV-F 3G 0.75mm²	Page
A			2/2

4. Electrical & Physical Properties

Item		Specification	
Rating Voltage		70°C 300/500V	
Conductor resistance(AT 20°C)		26.0Ω/Km MAX	
Insulation Resistance(AT 70°C)		0.011MΩ/Km Min	
Dielectric Strength		AC 2.0 KV / 15 min No Brak	
Spark Test		6.0KV	
Insulation	Unaged	Tensile Strength	1.02 kgf/mm ² min
		Elongation	150% Min
	Aged	Tensile Strength	80~120% (80°C x168hrs)
		Elongation	80~120% (80°C x168hrs)
	Loss of mass Test		2.0mg/cm ² (max)
Jacket	Unaged	Tensile Strength	1.02 kgf/mm ² min
		Elongation	150% Min
	Aged	Tensile Strength	80~120% (80°C x168hrs)
		Elongation	80~120% (80°C x168hrs)
	Loss of mass Test		2.0mg/cm ² (max)
Deformation Test		70±2°C X 4hr ≤ 50%	
Cold Bend Test		-15°C x 1hr No Crack	
Heat Shock Test		150±2°C x 1hr No Crack	

Graph:

