

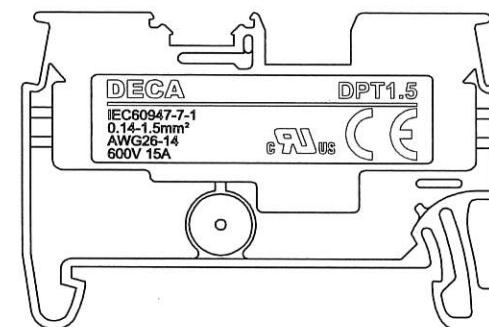
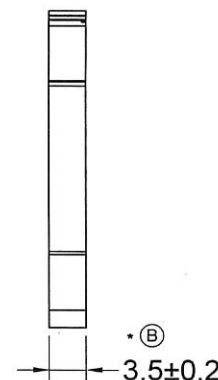


Type No.: DPT1.5

COLOR

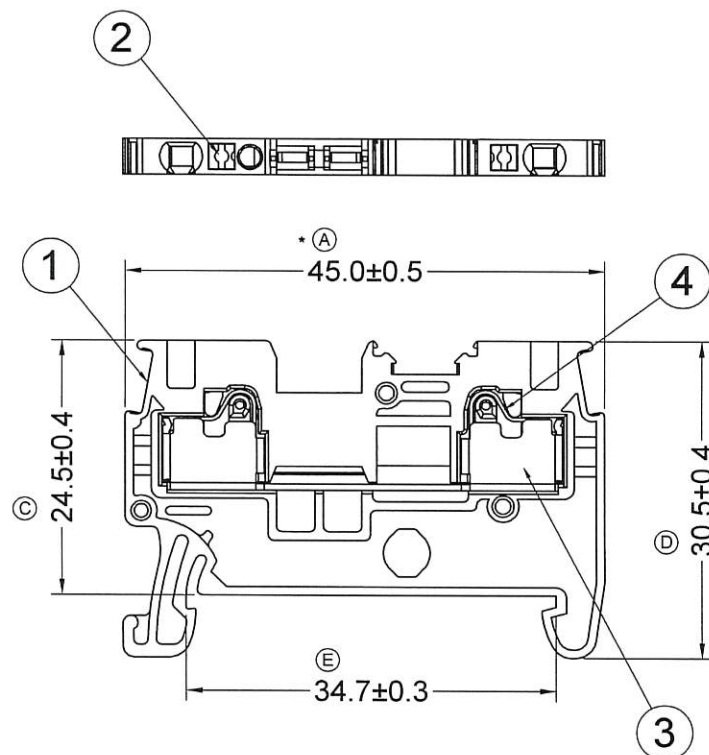

RoHS
Compliant

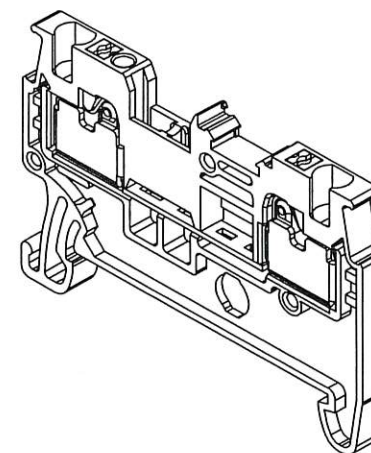

1. Rated current & voltage : 15Amp 300V(UL B,C class)
5Amp 600V (UL D class)
2. Rated current & voltage : 17.5Amp 500V(IEC)
3. Rated surge voltage: 6KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 8mm-10mm
6. Wire size : 26 - 14 AWG (0.14-1.5mm²)

CONFIRMED & ACCEPTED BY

	Material	Q'TY	Plating/Finish	Remark
1	Insulating body Polyamide 66	1		
2	Button PBT	2		
3	Terminal COPPER	1	Tin plated	
4	Spring STAINLESS	2		

DECA® SwitchLab Inc.

DESIGN	CHECK	APPROVE
DATE	DATE	DATE
2018/03/07	2018/03/07	2018/03/07

PART NAME	UNIT	SCALE
Terminal Blocks	MM	
DRAWING NO.		SHEET
DPT1.5 x		1 / 1