



前置端子系列(Front Terminal)

FT12-150(12V150Ah)




规格 Specifications

额定电压 Rated Voltage	12V		
标称容量 Nominal Capacity(C ₁₀ , 1.80V/cell)	150Ah		
尺寸 Dimension	长 Length	551±2mm (21.7 inches)	
	宽 Width	110±2mm (4.33 inches)	
	高 Container Height	288±2mm (11.3 inches)	
	总高(含端子) Total Height	288±2mm (11.3 inches)	
重量 Approx Weight	44.2kg (97.4 lbs)		
端子 Terminal	M6		
外壳材料 Container Material	ABS		
额定容量 Rated Capacity(25°C)	159.0 Ah	C20(7.95A, 1.80V/cell)	
	150.0 Ah	C10(15.0A, 1.80V/cell)	
	131.5 Ah	C5(26.3A, 1.75V/cell)	
	119.4 Ah	C3(39.8A, 1.75V/cell)	
	100.7 Ah	C1(100.7A, 1.60V/cell)	
5S最大放电电流 Max. Discharge Current	1500A (5s)		
内阻 Internal Resistance(25°C)	Approx 4.3mΩ		
运行温度 Operating Temp. Range	放电 Discharge	-15 ~ 50°C (5 ~ 122°F)	
	充电 Charge	-20 ~ 40°C (-4 ~ 104°F)	
	存储 Storage	-15 ~ 40°C (5 ~ 104°F)	
推荐温度 Nominal Operating Temp. Range	25±5°C (77±5°F)		
最大充电电流 Max.Charging Current(25°C)	45A		
充电电压 Charge voltage(25°C)	浮充 Float	2.25±0.02V/cell	温度补偿 Temp. Coefficient
	均充 Equalization	2.35~2.40V/cell	-3mV /单格/°C
	循环 Cycle	2.45±0.05V/cell	-4mV /单格/°C
	40°C (104°F)		-5mV /单格/°C
温度对容量影响 Effect of temp. to Capacity	25°C (77°F)		106%
	0°C (32°F)		100%
			86%
自放电 Self Discharge	≤3%/月 @ 25°C		



外形 Layout

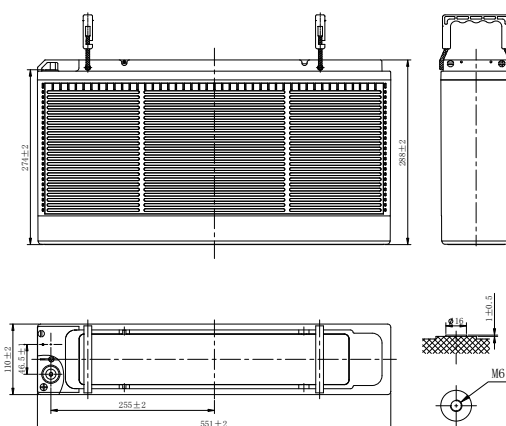

恒流放电表(A)25°C Constant Current Discharge

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	312.2	233.0	194.1	163.1	125.4	93.6	79.0	59.3	47.4	35.8	28.5	23.8	20.7	16.8	14.1	7.53
1.80V/cell	363.9	274.8	225.7	188.0	141.7	104.6	87.5	64.9	51.6	38.7	30.7	25.7	22.2	18.0	15.0	7.95
1.75V/cell	397.1	294.7	238.8	197.2	148.1	108.9	90.7	67.0	53.2	39.8	31.5	26.3	22.7	18.3	15.2	8.05
1.70V/cell	430.1	314.3	252.4	207.5	154.7	113.0	94.0	69.3	54.9	40.9	32.3	26.8	23.1	18.7	15.5	8.15
1.67V/cell	449.1	325.8	260.3	213.4	158.6	115.5	96.0	70.6	55.8	41.5	32.7	27.2	23.4	18.8	15.6	8.21
1.60V/cell	495.0	352.5	279.0	227.3	167.6	121.5	100.7	73.7	58.1	43.1	33.8	28.0	24.1	19.3	15.9	8.36

恒功率放电表(W/cell) 25°C Constant Power Discharge

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	593.2	446.1	372.9	314.3	242.3	181.4	153.6	115.6	92.7	70.2	56.0	46.9	40.8	33.2	27.8	15.0
1.80V/cell	681.0	519.7	429.1	358.7	271.7	201.4	168.9	125.7	100.4	75.6	60.2	50.4	43.6	35.5	29.6	15.8
1.75V/cell	731.8	550.5	449.2	372.7	281.5	207.9	173.9	129.2	102.9	77.3	61.5	51.4	44.4	36.1	30.1	16.0
1.70V/cell	779.7	579.4	469.4	388.3	291.3	214.1	179.0	132.7	105.6	79.2	62.8	52.4	45.3	36.6	30.5	16.2
1.67V/cell	806.2	596.0	485.5	396.8	297.0	217.8	181.9	134.6	107.0	80.1	63.5	52.9	45.7	37.0	30.7	16.3
1.60V/cell	866.3	631.8	506.5	415.9	309.8	226.7	188.9	139.5	110.7	82.6	65.3	54.3	46.8	37.7	31.3	16.6



前置端子系列(Front Terminal)

FT12-150(12V150Ah)



应用 Applications

- 电源系统
Power system
- UPS
- 通信系统网络连接设备
Network connection equipment of communication system
- 局域网专用电网系统
Power system of special network of local area network
- 电站系统
Power station systems


特征 General Features

- 适用于19英寸或23英寸电源柜
Specifically ideal for 19 inches or 23 inches power cabinets
- 前置端子使电池安装、维护和监控简便
Front terminals make the installation, maintenance and supervision easy
- 屏蔽设计保护端子避免短路，且外形美观
Shield designs protect terminals from short circuit and show good appearance
- 独特的安全阀设计：减少失水，防止空气/火花进入
Unique vent valve design: reduce water losing and prevent air/spark going inside


标准 Standards

- 符合IEC 60896，YD/T 2343标准
Compliance with IEC 60896 and YD/T 2343 standards
- UL 认证，泰尔认证，CE 认证
UL Certified, TLC Certified, CE Certified
- 企业通过了IATF16949, ISO 45001, ISO 9001和ISO 14001体系认证
Manufactured in Leoch® IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


放电特性曲线 Discharge Characteristics

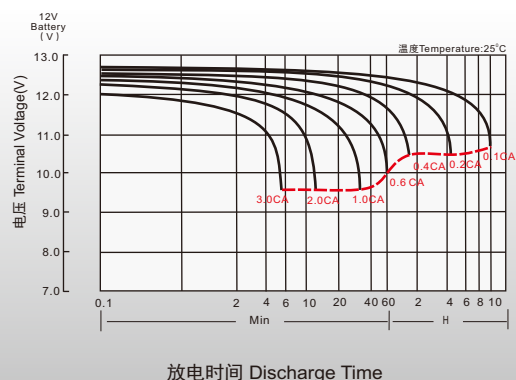

浮充特性曲线 Float Charging Characteristics

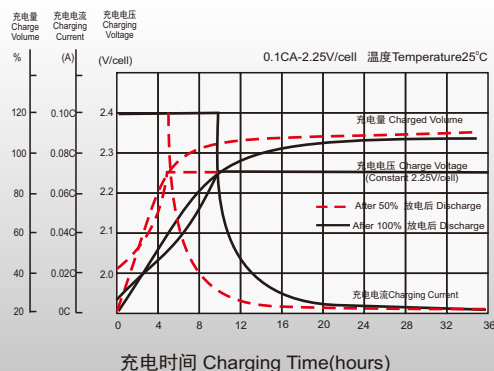

温度对容量影响 Temperature Effects in Relation to Battery Capacity

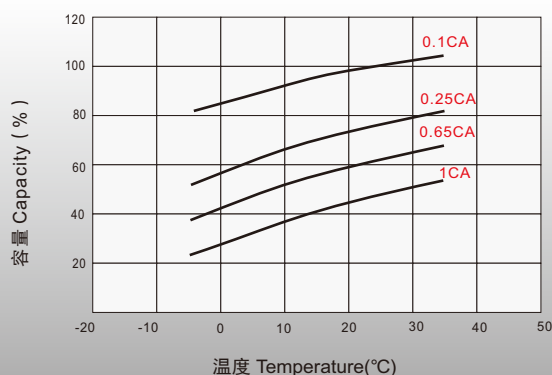

温度对浮充寿命影响 Temperature Effects on Long Term Float Life

